

Refrigerated/heated circulating baths » LT ecocool range

LT ecocool energy efficient Refrigerated/heated circulating baths

A new range of innovative, eco-friendly, refrigerated heated circulating baths offering significant running cost savings whilst delivering powerful cooling. Consisting of two models, the LT ecocool range is supplied assembled as ready to use kits, complete with accessory hosing*, clips and connectors as standard.

- Choice of two models, temperature range -25°C to 150°C* (model dependent)
- Industry leading 4 year warranty with Grant renowned service and support, no registration required
- Active cooling through the whole temperature range
- True energy saving of up to 80% against standard compressor units



* Temperature range of hosing supplied: -40°C to 100°C (can be cut to length as required). Supplied tubing 2 x 1.5m ID 9mm Ø



Applications:

- Pharmaceutical - mini pilot plant reactors
- Education - rotary evaporator cooling, replacement of running tap water cooling, immersing small samples, photometry, chromatography systems
- Industrial - QC testing, sample preparation, general cooling, reaction chemistry, temperature control, semi-conductor manufacturing, rheometry
- Food - refractometry
- Life-science - electrophoresis cooling
- High temperature cooling - active up to 150°C

Refrigerated/heated circulating baths » Models, options and accessories

LT ecocool refrigeration range – Models and specifications

			LT ecocool 100	LT ecocool 150
			 h: 640mm d: 430mm w: 245mm weight: 29kg	 h: 640mm d: 430mm w: 245mm weight: 29kg
Temperature range	°C		-20 to 100	-25 to 150
Temperature stability	±°C		0.05	0.02
Flow rate (max)	L/min		17	14 - 22 (adjustable)
Pump pressure (max)	mbar		250	530
Tank volume	L		5	6
Working Area (d x w)	mm		118 x 154	
Min/Max liquid level	mm		85/145	130/145
Calibration points			2	5
Cooling power (typical)	@ 20°C	W	240	385
	@ 0°C	W	200	205
	@ -10°C	W	100	105
	@ -20°C	W	30	60
Programs			-	1 x 30 segments Labwise™ required
Communication interface			-	USB
Temperature probe socket			-	6 pin mini DIN
Display			4 digit LED	Full colour QVGA TFT
Languages			-	EN, FR, DE, IT, ES
Timer			1 min to 99 hrs 59 mins	
Temperature presets			3	
Alarms			High	High and low
Electrical power (max) W			2160/2070 (60/50 Hz)	2280/2760 (50-60 Hz)
Safety	120V/230V		Adjustable over temperature cut-out	
Ready to use kits			Assembled and supplied with standard tubing, insulation, clips and connectors	

Refrigerated/heated circulating baths » Models, options and accessories

Options and accessories

Labwise™ PC software (optional)

Allows two-way communication for status display, programming and data capture (see page 3.1. for more information). USB cable provided

-



External probes

PEP plastic probe

-

•

•

SEP stainless steel probe

-

•

•

Vertical turbine pumps (optional) - when pump is fitted, available working area is reduced.

Low noise, compact design. Supplied with pipe connections and special lid for fitting to tank, pipe bore 12.7 mm.

VTP1-LT

maximum pressure

1000 mbar

maximum flow

9 L/min



Required only where application demands a higher pressure than that delivered by the internal pump to maintain flow.

Note: The optional VTP pumps will transfer additional heat to the baths and reduce the net cooling power of the refrigeration unit. The above figures must be taken into consideration when choosing the refrigeration unit. when ordering a VTP pump, please specify which refrigeration base unit it is to be used with.

VTP2-LT

maximum pressure

1650 mbar

maximum flow

12 L/min



Note: Other sizes of heat exchange coil can be made to your specification, contact Grant for further information.

Heat exchange coil

CW5 Other sizes of heat exchange coil can be made to your specification, contact us for further information



Temperature range: 2°C above the temperature of the coolant
Coil Øxl: 77x55mm
Pipe bore inlet/outlet: 7mm

Hose Kits

HOSE100 General purpose hose kit: -40°C to 100°C

HOSE200 High temperature hose kit: -50°C to 200°C



Hose kit 2 x 2m, assembled with Optima™ pump outlet plate and simple hose clips, no tools required.

High pressure pumps (optional)

			VTP pumps		Heat exchange coil
			VTP1-LT	VTP2-LT	CW5
					
Maximum pressure	water	mbar	1000	1650	-
Maximum flow	water	L/min	9	12	-
Pipe bore	inlet/outlet	mm	12.7	12.7	7
Electrical connection			10 amp IEC	10 amp IEC	-
Power consumption		W	30	40	-
Power output to liquid @ 20°C		W	15	22	-
Safety			thermal fuse	thermal fuse	-
Temperature range		°C	-	-	2°C above coolant temperature
Coil Øxl		mm	-	-	77 x 55


Options and accessories

Options and accessories							
• = compatible	LT ecocool™ 100	LT ecocool™ 150	T100-R4/R5	TC120-R4/R5	TX150-R4/R5	TXF200-R4/ R5	LTC4
Labwise™ software (see section 3 for further information) 	-	•	-	-	•	•	•
Temperature probes, 3m cable							
TXPEP plastic probe	-	-	-	-	•	•	•
TXSEP stainless steel probe	-	-	-	-	•	•	•
PEP plastic probe	-	•	-	-	-	-	-
SEP stainless steel probe	-	•	-	-	-	-	-
VTP1-LT maximum pressure 1000 mbar maximum flow 9 L/min 	•	•					
VTP2-LT maximum pressure 1650 mbar maximum flow 12 L/min 	•	•	-	-	-	-	-
VTP1-PLR4/VTP1-PLR5 maximum pressure 1000 mbar maximum flow 9 L/min 			•	•	•	•	•
VTP2-PLR4/VTP2-PLR5 maximum pressure 1650 mbar maximum flow 12 L/min 	-	-	•	•	•	•	•
CW5 heat exchange coil 	•	•	•	•	•	•	•
IQOQ documentation	IQOQ LT ecocool™ 100	IQOQ LT ecocool™ 150	IQOQ T100 + IQOQ R4 IQOQ T100 + IQOQ R5	IQOQ TC120 + IQOQ R4 IQOQ TC120 + IQOQ R5	IQOQ TX150 + IQOQ R4 IQOQ TX150 + IQOQ R5	IQOQ TXF200 + IQOQ R4 IQOQ TXF200 + IQOQ R5	IQOQ LTC4
PQ documentation	PQ LT ecocool™ 100	PQ LT ecocool™ 150	PQ T100 + IQOQ R4 PQ T100 + IQOQ R5	PQ TC120 + IQOQ R4 PQ TC120 + IQOQ R5	PQ TX150 + IQOQ R4 PQ TX150 + IQOQ R5	PQ TXF200 + IQOQ R4 PQ TXF200 + IQOQ R5	PQ LTC4 + IQOQ LTC4
Extended warranty 1 year EWC1	•	•	•	•	•	•	•
Extended warranty 2 years EWC2	-	-	•	•	•	•	-

Options and accessories

Pump connectors (optional)		Part number
	Replacement plastic pump inlet/outlet connector. Fits tubing 9mm inner dia. Temp range -50°C to 200°C.	P-M6
	Replacement plastic pump inlet/outlet connector. Fits tubing 15mm inner dia. Temp range -50°C to 200°C.	P-M11
	Metal pump inlet/outlet connector, dual seal super rapid 4mm. Fits semi rigid tubing 4mm outer dia. Temp range -20°C to 100°C.	M-SR4
	Metal pump inlet/outlet connector, dual seal super rapid 6mm. Fits semi rigid tubing 6mm outer dia. Temp range -20°C to 100°C.	M-SR6
	Metal pump inlet/outlet connector, dual seal super rapid 8mm. Fits semi rigid tubing 8mm outer dia. Temp range -20°C to 100°C.	M-SR8
	Metal pump inlet/outlet connector, hose barb 7mm. Fits flexible tubing 7mm inner dia. Temp range -40°C to 120°C.	M-HB7
	Metal pump inlet/outlet connector, hose barb 9mm. Fits flexible tubing 9mm inner dia. Temp range -40°C to 120°C.	M-HB9
	Metal pump inlet/outlet connector, hose barb 12mm. Fits flexible tubing 12mm inner dia. Temp range -40°C to 120°C.	M-HB12
	Metal pump inlet/outlet plate, 1/4 " BSP/G1/4 female. Temp range -50°C to 200°C.	M-UC
	General purpose hose kit, includes 2 x 2m general purpose insulated hosing -40 to 100°C, assembled with LT ecocool™/Optima™ pump outlet plate and simple hose clips, no tools required. Can be cut to length. 10mm ID, 14mm OD.	HOSE100
	High temperature hose kit, includes 2 x 2m high temperature insulated hosing -50 to 200°C, assembled with LT ecocool™/Optima™ pump outlet plate and simple hose clips, no tools required. Can be cut to length. 8mm ID, 11mm OD.	HOSE200

Overall dimensions

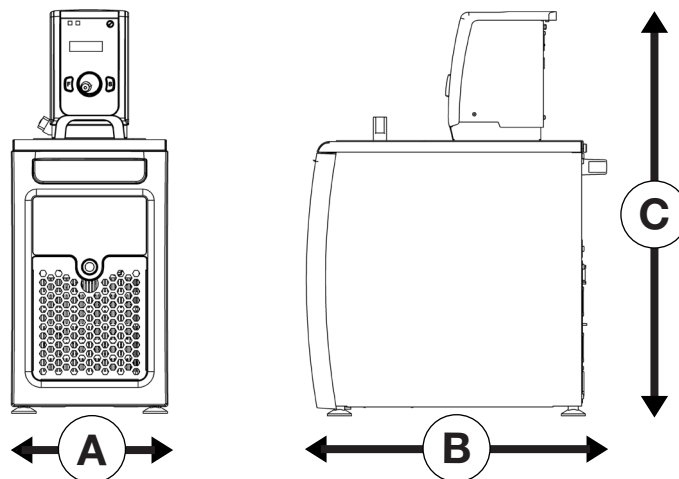


Please note images are for representation purposes only

Packed weight: 36.3kg
Product weight: 29.1kg

Packed dimensions:
A: 465mm
B: 610mm
C: 755mm

Product dimensions:
A: 245mm
B: 430mm
C: 640mm

Working area

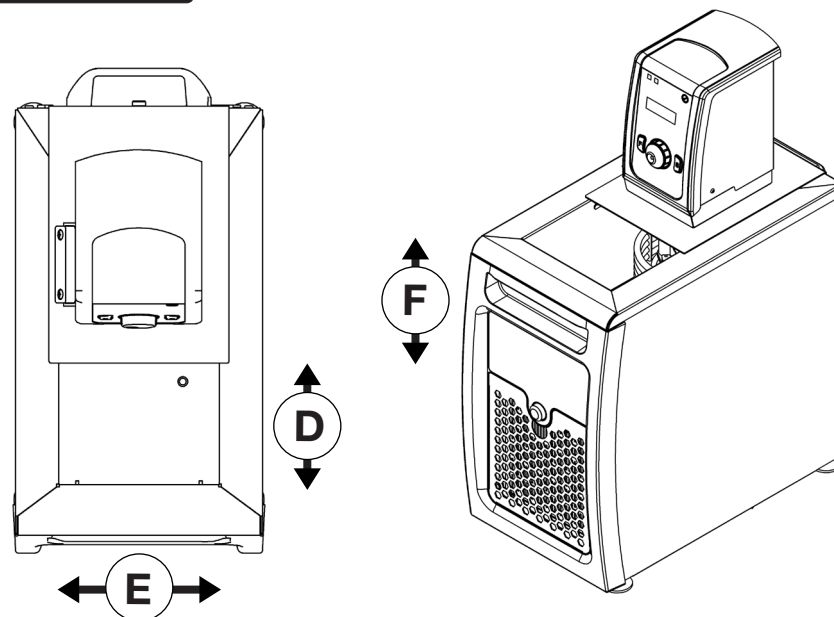

Working area:
D: 118mm
E: 154mm
F: 145mm
(10mm below top)

LT ecocool™ 100 minimum immersion volume depth: 85mm

LT ecocool™ 150 minimum immersion volume depth: 130mm

Please note images are for representation purposes only

Vessel capacity without lid


Duran 21-801: 50ml	9 ⁺
Duran 21-801: 100ml	4
Duran 21-801: 150ml	3
Duran 21-801: 250ml	2
Duran 21-801: 500ml	1
Duran 21-801: 750ml	1
Duran 21-801: 1000ml	1
Duran YOUTILITY: 125ml	4
Duran YOUTILITY: 250ml	2
Duran YOUTILITY: 500ml	2
Duran YOUTILITY: 1000ml	1

Vessel capacity with tank lid

Erlenmeyer flask: 100ml	4
Erlenmeyer flask: 250ml	2
Erlenmeyer flask: 500ml	1
Erlenmeyer flask: 1000ml	1*

* Bridge plate released

+ May need height support in the tank depending on fill level

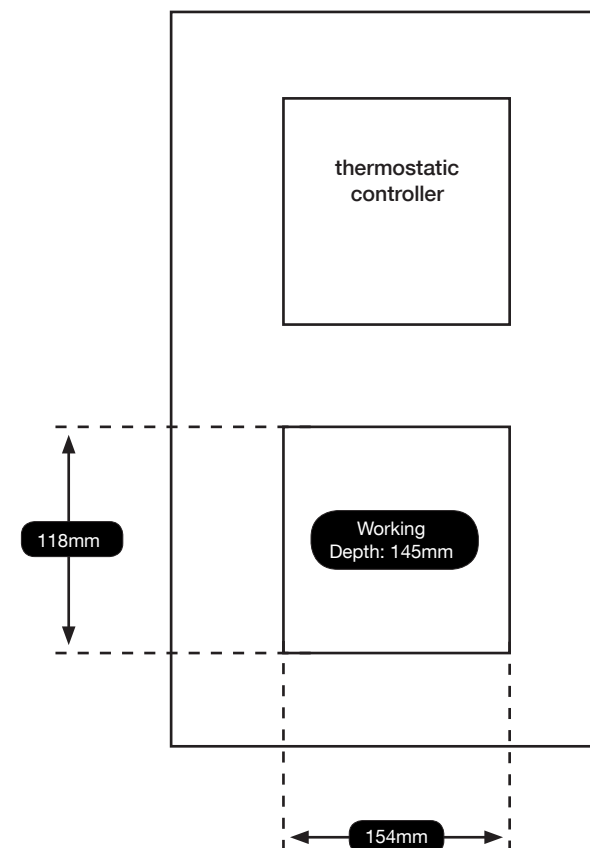



WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.