


Battery Shaker KM 2 Akku

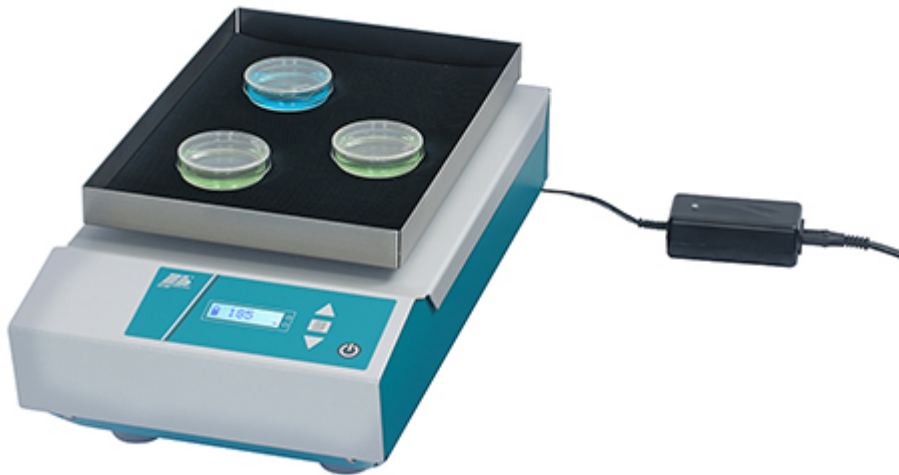

Description

The Battery Shaker KM 2 Akku with orbital motion can be used for various tasks thanks to its off-grid battery with a run time of min. 40 hours. The shaking platform of 200 x 295 mm can be loaded with max. 2 kg. The stroke of the laboratory shaker KM 2 Akku is 20 mm and the shaking speed is between 5 and 220 rpm.

Basic Equipment

Basic device incl. basic platform and rubber mat, with battery charger / power unit

Loading Capacity

Erlenmeyer flasks 100 ml 9 pieces

Erlenmeyer flasks 500 ml 4 pieces

You will find further loading possibilities [here](#)

Details

Motion:	orbital
Shaking platform:	200 x 295 mm
Max. load:	2 kg
Shaking speed:	5 - 220 rpm, in steps of 5
Stroke:	20 mm

Battery charging time: approx. 10 h
Runtime Battery: min. 40 h
Runtime with mains cable: 0 - 99 h 59 min / continuous
Order No.: 6135 000
Accessory: Universal tray KM Mini
Universal tray KM
Clamping strip KM

Technical specifications

Electrical supply battery charger: 100 - 240 V, 50 / 60 Hz
Internal electrical supply: 1 battery 12 V / 7 Ah
Enclosure protection: IP 21
Heat emission: approx. 4 W
Ambient temperature: 4°C to 45°C
Relative humidity: ~ 95 % (non-condensing)
Dimensions (w x d x h): 250 x 415 x 145 mm
Weight: 10,5 kg



Wolf Laboratories Limited

www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk



Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

