

ENVAIR

Laboratory Equipment



MICROBIOLOGICAL SAFETY CABINETS

ENVAIR ECO SAFE COMFORT

CLASS II
MICROBIOLOGICAL SAFETY CABINET

CLEAN TECHNOLOGY FOR A CLEAN ENVIRONMENT

ENVAIR ECO SAFE COMFORT - THE CLEAN GENERATION

Envair eco safe Comfort Safety Cabinets belong to the latest generation of laminar airflow systems. The high quality choice of materials and construction guarantees conformity to the strictest safety standards.

Envair eco safe Comfort cabinets are class 2, designed and built to performance requirements of BS EN-12469:2000, with 70% of the air re-circulated via the main downflow class H14 HEPA filter and the remaining 30% discharged through the exhaust Class H14 HEPA filter.




TECHNOLOGY OF TODAY FOR THE WORLD OF TOMORROW

AN EFFICIENT DESIGN

- Certified 'low pressure-drop' HEPA filters providing up to 30% saving on power consumption
- Electronically controlled fan with automatic pressure-drop compensation
- 99% recyclable components
- Innovative technologies such as the new ECS® microprocessor

HARDWARE

- ALESTA® Anti-microbial coating
- Low noise level
- Stainless steel AISI 316L
- True laminar flow

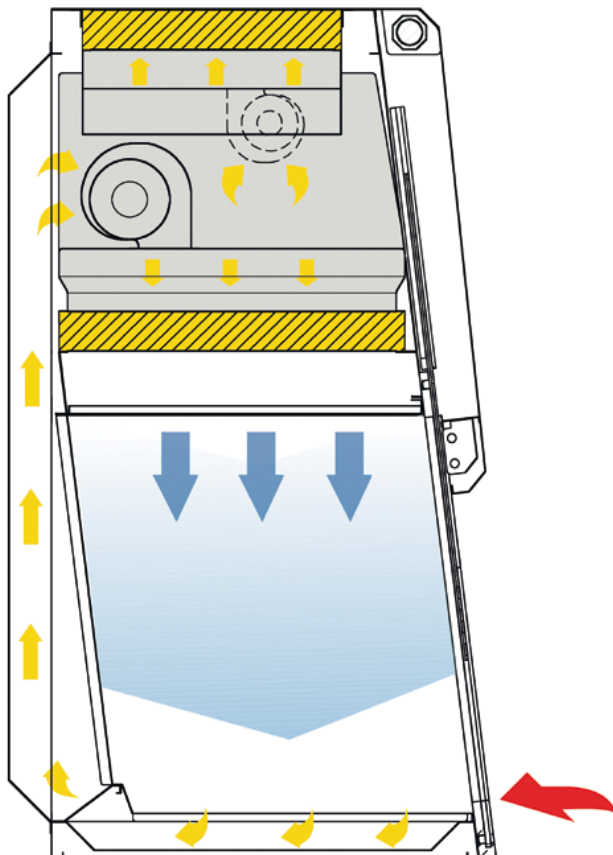

Airflow

ECO CONTROLLING SYSTEM (ECS)

The new ECS® microprocessor employs the latest innovative methods of integrated management of all the principal functions of ventilation and filtration - self-regulating all the main filtration and ventilation system components - compensating for declining pressure drops and restoring power balance. Combining the use of AC fan and certified low pressure-drop filters, the new ECS® controlling system optimize power consumption, reducing CO2 emissions into the environment.

SOFTWARE

- Instant management and monitoring of operational parameters and automatic compensation system control by the new ECS® microprocessor
- Software features easily programmable replacement regime of spare parts and filters
- Countdown-Timer integrated within the control board
- Permanent record of all alarms and anomalies memorized by the control-board for the entire life-cycle of the cabinet
- One touch restore menu, to reset the original factory calibration data



Cabinet service fixtures



Electrical upwards opening frontal screen for easy cleaning

TECHNICAL SPECIFICATIONS

| Envair Eco Safe Comfort | | | | |
|---|----------------------|----------------------|----------------------|----------------------|
| Unit type: | 0.9m | 1.2m | 1.5m | 1.8m |
| Overall dimensions WxHxD ^[1] | 1045x1500x860mm | 1350x1500x860mm | 1655x1500x860mm | 1960x1500x860mm |
| Useful dimensions WxHxD | 887x740x580mm | 1192x740x580mm | 1497x740x580mm | 1802x740x580mm |
| Working aperture | 200mm | | | |
| Max front aperture | 440mm | | | |
| Net weight | 170kg | 195kg | 225kg | 260kg |
| Exhaust flow rate | 290m ³ /h | 390m ³ /h | 485m ³ /h | 585m ³ /h |
| Noise level ^[2] | <53dB(A) | <54dB(A) | <55dB(A) | <56dB(A) |
| Lighting level | >1100 lux | >1200 lux | >1300 lux | >1300 lux |
| Electrical data | 1Ph+E 230V 50Hz | | | |
| Power consumption ^{[2], [3]} | 281W | 390W | 587W | 691W |
| Current consumption | 1.9A | 2.1A | 3.4A | 3.6A |
| Electrical class / IP | 1 / 20 | | | |
| Internal electrical outlet | 6A | | | |
| Heat emission | 175W | 240W | 295W | 360W |

1. The total depth of the cabinet can be easily reduced to 780mm by removing the back panel

2. At operational conditions according to EN12469:200

3. Clean filters, lighting activated, internal outlet load excluded



OPTIONS AND ACCESSORIES

- | | | |
|--|---|--|
| <ul style="list-style-type: none"> ▪ Single piece work surface ▪ UV light ▪ Additional taps for gas, vacuum, nitrogen ▪ Additional electrical outlet ▪ IV bar | <ul style="list-style-type: none"> ▪ Armrest ▪ Anti-blow back valve ▪ Direct duct exhaust connection kit ▪ Additional exhaust HEPA filter ▪ Additional exhaust carbon activated filter | <ul style="list-style-type: none"> ▪ Support stand 800mm ▪ Electric adjustable floor stand (800-1100mm) ▪ Support stand with lockable castors |
|--|---|--|

MICROBIOLOGICAL SAFETY CABINETS

ENVAIR ECO SAFE COMFORT

MODEL DIMENSIONS

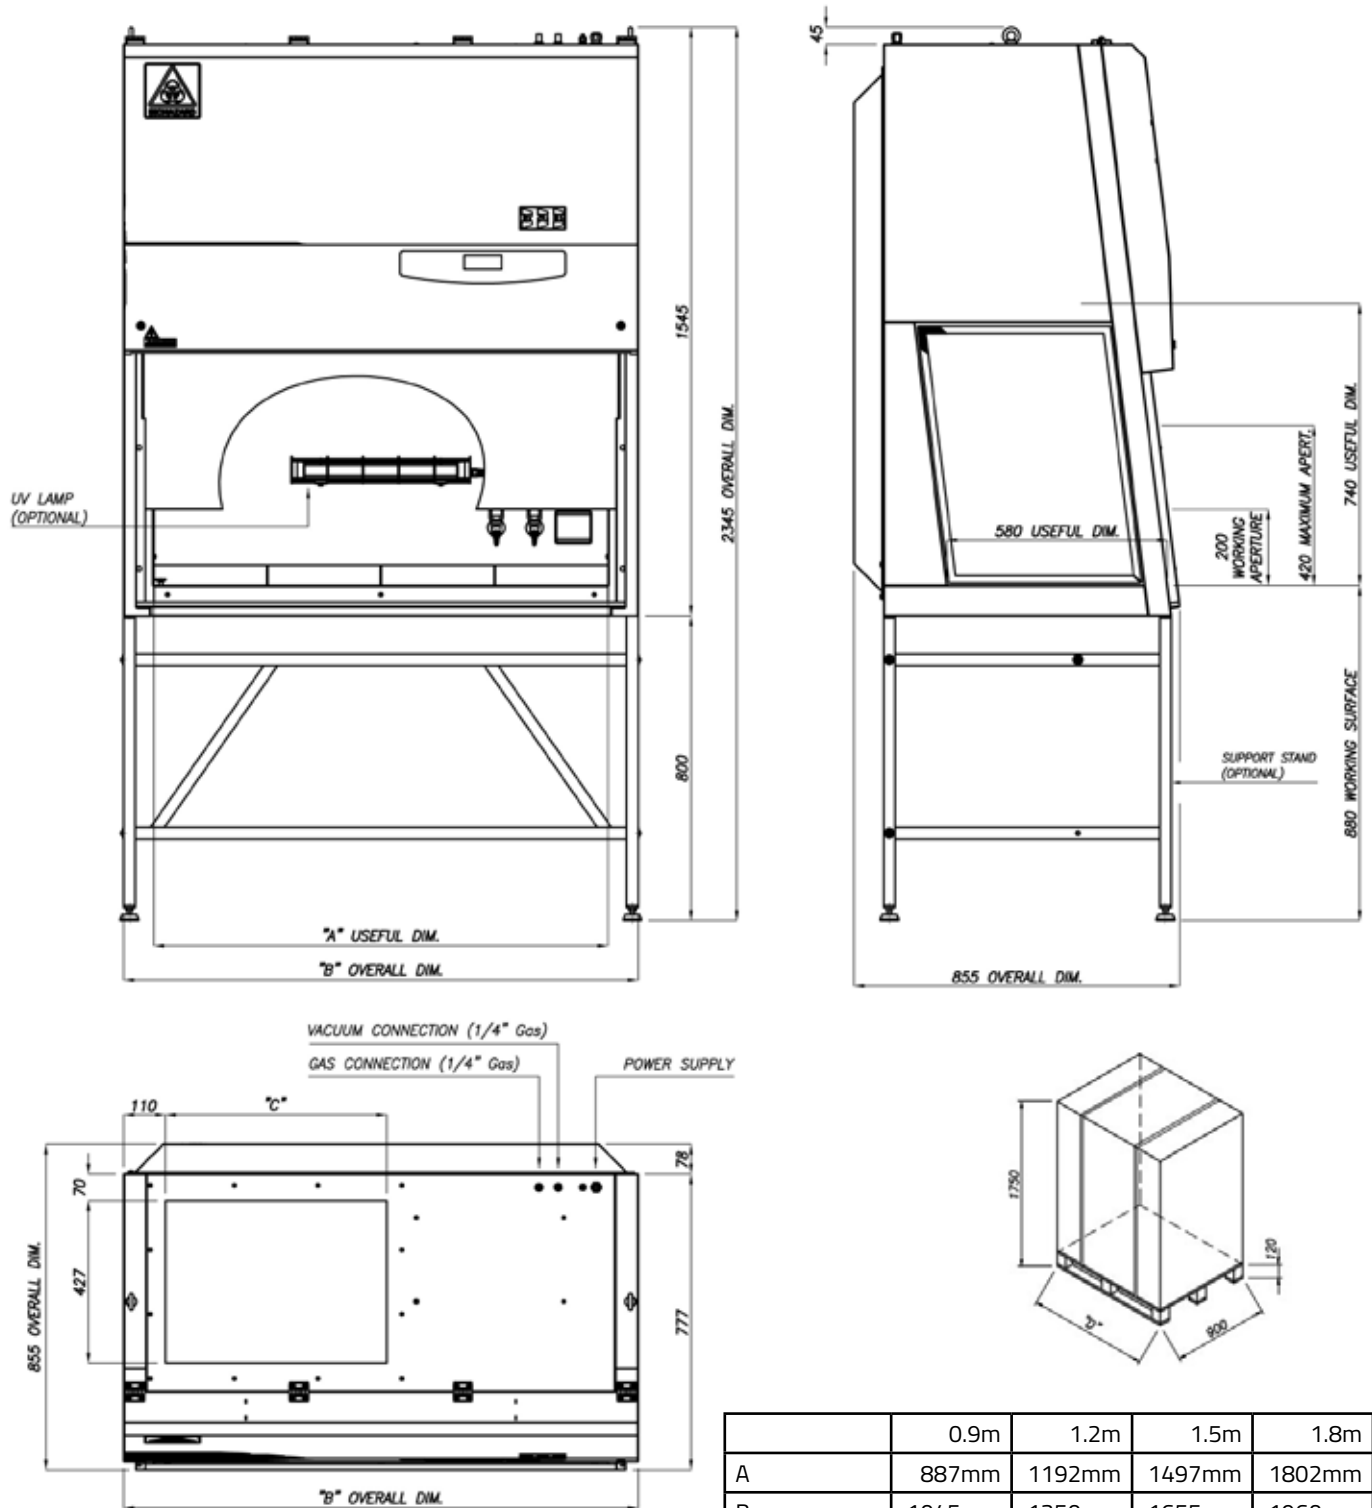

| | 0.9m | 1.2m | 1.5m | 1.8m |
|--------------|--------|--------|--------|--------|
| A | 887mm | 1192mm | 1497mm | 1802mm |
| B | 1045mm | 1350mm | 1655mm | 1960mm |
| C | 427mm | 580mm | 732mm | 885mm |
| D | 1110mm | 1470mm | 2060mm | 2060mm |
| Gross weight | 220kg | 255kg | 295kg | 340kg |

OUR TECHNOLOGY PROTECTS HUMAN AND ENVIRONMENT

USER-FRIENDLY CONTROL PANEL

ECS® is a Microprocessor based monitoring system that provides a full status report provided via 2-line digital display. All functions and safety alarm systems are controlled ensuring that performance characteristics are maintained to the EN12469:2000 standard. A battery backup system stores safety data to the ECS system in the event of a power outage. The user-friendly control panel and the LCD display will continuously display the necessary data, keeping the user constantly informed of the cabinet conditions in operations and in particular:

- Display of laminar airflow velocity and inflow velocity
- Display of internal and external temperatures
- Display of residual lifetime of HEPA filters, UV Lamp (if fitted)
- Display of total operational usage hours
- Display of saturation level of HEPA filters



AUDIO VISUAL ALARMS PROVIDED FOR

- Incorrect airflow velocities
- Incorrect position of front window
- Saturation of HEPA filters
- End of life cycle of UV lamp (if fitted)
- Blockage in the exhaust duct
- Fan malfunction
- Power failure

CERTIFICATION

- ISO 9001 certified
- Tüv Rheinland Certified
- BS EN 12469:2000

MAIN FEATURES

- Motorised sliding front window
- Vacuum connection
- Safety service connection for gas
- 1 electrical socket for 3ft and 4ft cabinets
- 2 electrical sockets for 5ft and 6ft cabinets
- Overnight operation mode for reduced energy consumption

TAYLOR-MADE CABINETS

*"We can manufacture special cabinets to meet your requirements.
Please get in touch for details."*

APPLICATIONS

Envair eco safe Comfort microbiological safety cabinets have been adopted worldwide in use for product, personnel and environmental protection while handling harmful agents pathogenic to human beings and/or animals as defined in the appropriate International Standards, in a wide range of disciplines in applications such as:

Microbiology, Virology, Haematology, Cell culture, Genetics, Handling of hazardous agents to human beings or animals.



Wolflabs

Wolf Laboratories Limited

www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk



Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

