

# Product Code: EP700L 10-105 EcoPro G2 600 Litre Upright Freezer Cabinet



### Features & Benefits

- All new thicker and more robust cabinet design with advanced thermal efficiency and market leading capacity making your money go further
- New 'smartphone style' touch sensitive hidden-until-lit control panel with unique high visibility temperature display combines sophistication with functionality
- All-new ergonomic door and handle design for ease of opening and cleaning
- Designed using high technology: 'Fluid Food-Fresh Dynamics' modelling, the new and improved advanced Foster Circulair II air distribution system maximises efficient operation even when shelves are fully loaded
- Brand-new refrigeration system designed to be the most technologically advanced and energy efficient yet
- Features Foster's new award-winning +stayclear condenser, revolutionising the effective operation of your refrigeration, ensuring your equipment works more efficiently for longer


External Finish		Internal Finish		Shelving	
s/steel ext, 304 s/s door	Standard	aluminium	Standard	Additional S/S Trayslides	Option
304 S/S back for island sitting	Option	Doors		Additional GN2/1 Shelf	Option
Base Fittings		<b>D</b> 0013		3 Shelves (GN 2/1)	Standard
Dase i illings		Solid	Standard	Refrigeration	,
Castors 80mm	Standard	Left Hand Hinged Door	Option	Remgeration	
Electrical, Service & Ecodesign  Data		Product Extras		R404a - Industry Standard	Standard
				Less Condensing Unit	Option
230/50/1	Standard	Helicoil Mains Lead	Option	Specification	
220/60/1 Electrical Supply	Option			Dimensions (Width)	700
Fuse Required	13			Dimensions (Height)	2080
<b>Global Warming Potential</b>	3922			Dimensions (Depth)	820
Energy Efficiency Index	63.42			Weight (Unpacked, kg)	121
Refrigerant Charge	0.275			Weight (Packed, kg)	132.6
				Gross Volume	600

Noise Dba @ 1M

64.1

## Footnotes

- 150mm castors are not available if product is supplied less condensing unit
- Adequate airflow and service space must be kept above the top of cabinet: 310mm
- Depth with door open is 1500mm
- Decibel rating measured 1m high from the floor and 1m out from the cabinet

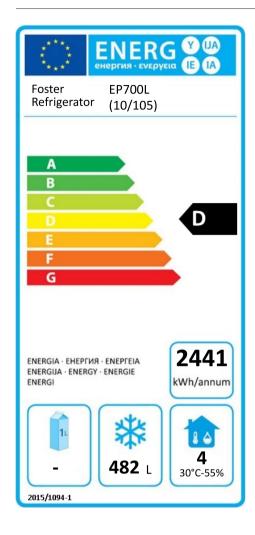

#### **Application**

This appliance is intended for use in ambient temperatures up to 40°C **Safety** 

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

#### Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit our policies















## **Wolf Laboratories Limited**

www.wolflabs.co.uk

Tel: 01759 301142

Fax:01759 301143

sales@wolflabs.co.uk







Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.





