

# Product Code: EP1440H

# EcoPro G2 1350 Litre Upright Refrigerated Cabinet



### Features & Benefits


- Sleek, modern asthetics, robust construction and market leading capacity. 'Smartphone style' fuzzy logic II touch sensitive control panel with high visibility temperature display
- · Low energy refrigerant system with reduced running costs
- · Improved internal fittings for easy cleaning
- Foster Circulair II air distribution system maximises efficient operation even when shelves are fully loaded
- Operates efficiently in ambients up to 43°C
- Features Foster's new award-winning +stayclear condenser, revolutionising the effective operation of your refrigeration, ensuring your equipment works more efficiently for longer

Shelving		Base Fittings		Doors	
Additional S/S Trayslides	Option	Castors 80mm	Standard	Left and right hinged door	Standard
Additional GN2/1 Shelf	Option	Legs 150mm	Option	Solid	Standard
Refrigeration		Electrical & Service D	Data	Product Extras	
R290 - Energy Efficient	Standard	230/50/1	Standard	Helicoil Mains Lead	Option
R134a - Industry Standard	Option	220/60/1 Electrical Supply	Option	Energy	
Integral Refrigeration System	Standard	Fuse Required (A)	10	Lifeligy	
Less Condensing Unit	Option	Refrigerant Charge (kg)	0.330	kWh (24 hours)	3.58
Specification		Finish		AEC	1306.12
Specification		FilliSii		Nett Volume	964.6
Refrigerator +1/+4°C	Standard	s/steel ext, 304 s/s door & alu	Standard	Energy Grade	D
Width (mm)	1440		Ontion	Global Warming Potential	1430
Depth (mm)	820	304 s/s	Option	Energy Efficiency Index	59.54
Height (mm)	2080	304 S/S back for island sitting	Option		
Unpacked weight (Kgs)	182.5				
Packed weight (Kgs)	199.1				
Gross Volume (Ltr)	1350				
Noise dBA @ 1m	69.8				

## Footnotes

- 150mm castors are not available if product is supplied less condensing unit
- Adequate airflow and service space must be kept above the top of cabinet: 310mm
- Depth with door open is 1500mm
- Decibel rating measured 1m high from the floor and 1m out from the cabinet

#### Energy Performance Data and information

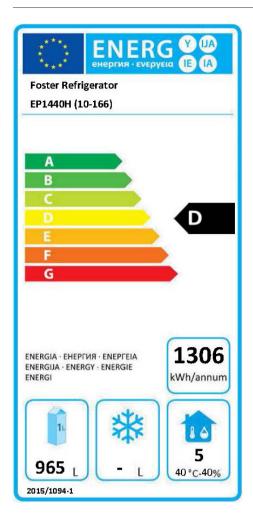

#### **Application**

This appliance is intended for use in ambient temperatures up to  $\{1\}^{\circ}C$  Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

#### Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit our policies













All images shown are for illustration purpose only. All images and photographs are not intended to be relied upon for, nor to form part of, any contract unless specifically incorporated in writing into the contract. Solely the dimensions and specifications incorporated in the quotation or purchase order confirmation shall be contractually binding.



## **Wolf Laboratories Limited**

www.wolflabs.co.uk

Tel: 01759 301142

Fax:01759 301143

sales@wolflabs.co.uk







Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.





