



# HETTICH BENELUX THERMOMIXERS AND THERMOBLOCKS

brochure\_ditabis\_mixers\_EN\_2016\_01.indd 1 09-02-16 12:59




brochure\_ditabis\_mixers\_EN\_2016\_01.indd 2 09-02-16 12:59






## ENGINEERED FOR YOU

## **Quality, innovation and service**



Benelux, in everything we do. You will see it in our products, A-class parts, certifications, eco-awareness, service and communication. Not only is innovation important, the maintenance of your equipment is also in good hands.

## **MULTIFUNCTIONAL THERMO SHAKER**

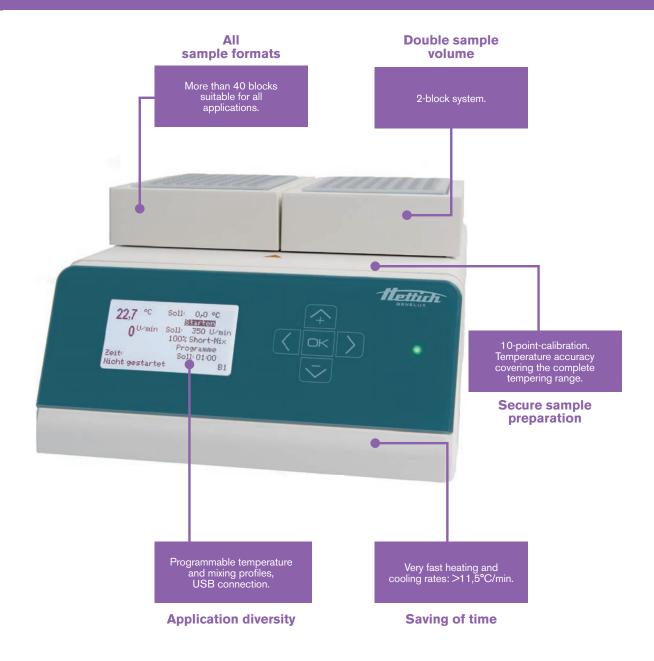



## From simply practical to highly flexible - Smart Control

Program up to 9 complete programs with 30 program steps and temperature curves in total – exactly tailored to your application. The application variety is rounded out by the short mix function e.g. for vortexing as well as interval shaking. The direction of rotation is switchable by the software.

Constant overview of your process at any time: with the detailed information on the display you always have an overview of the following values:

Parameters for programming	
Program no.	1-9
Number of cycles	1-9
Program steps	30
Progress time hours	0-99 h / infinite
Progress time minutes	0-59 min
Set temperature	-10°C bis +137°C
Rise time	0-99 min
Shaking frequency	200 to 1.500 rpm
Interval shaking, standstill (pause)	0,0 - 9,9 min
Interval shaking, mixing	0-9 sec



49,9°C Soll: 60,0°C Stoppen
200 U/min Soll: 200 U/min 100% Short-Mix

Läuft seit: 00:15 Soll: endlos Prozess ohne Programm B0

- Actual and set temperature
- Actual and set shaking frequency
- Actual and set time
- Program number, cycle, step

Navigate through the intuitive menu with only five key elements and adjust the 10 parameters to your application – this comfort is unsurpassable.

## Multifunctional Thermo Shaker MKR 13 Art.-no. 980123003











#### **Technical specification**

Temperature operation range Amb. -16°C ... +100°C

Temperature adjustable range -10°C... +105°C

Accuracy / Resolution +/- 0,1°C / 0,1°C

Maximum heating time 6°C / min

Maximum cooling time 12°C /min

Shaking frequency 200-1.500 rpm

Orbit 3 mm orbital

Dimensions (W x D x H) 220 x 330 x 144 mm

Capacity 1 exchangeable block

Weight 9 kg

Electrical heating / cooling power 130 W

Electrical supply 115/230 V, 50/60 Hz

Smart Control: 30 program steps, short mix, interval shaking

- Fast heating and cooling rates > 6°C/min
- Application diversity: Programmable temperatur and mixing profiles, USB connection

## Double-Block-Cooling Thermo Shaker MKR 23 Art.-no. 980223003











#### **Technical specification**

Temperature operation range Amb. -11°C ...+70°C

Temperature adjustable range 0°C...+80°C

Accuracy / Resolution +/- 0,3°C / 0,1°C

Maximum heating time 3,5°C / min

Maximum cooling time 6,5°C / min

Shaking frequency 200-1.200 rpm

Orbit 3 mm orbital

Dimensions (W x D x H) 220 x 330 x 144 mm

Capacity 2 exchangeable blocks

Weight 9,5 kg

Electrical heating / cooling power 200 W

Electrical supply 115/230 V, 50/60 Hz

Smart Control: 30 program steps, short mix, interval shaking

- Double sample volume: 2-block system
- Secure sample preparation: 10-point calibration

## Multifunctional Thermo Shaker MHR 13 Art.-no. 980423003









#### **Technical specification**

Temperature operation range Amb. +3°C ...+130°C

Temperature adjustable range 0°C...+137°C

Accuracy / Resolution +/- 0,1°C / 0,1°C

Maximum heating time 11,5°C / min

Shaking frequency 200-1.500 rpm

Orbit 3 mm orbital

Dimensions (W x D x H) 220 x 330 x 109 mm

Capacity 1 exchangeable block

Weight 6,5 kg

Electrical heating power 200 W

Electrical supply 115/230 V, 50/60 Hz

Smart Control: 30 program steps, short mix, interval shaking

- Saving of time: > 11,5°C/min
- Temperature working range: RT. +3°C ... +130°C

## Double-Block Thermo Shaker MHR 23 Art.-no. 980523003









#### **Technical specification**

Temperature operation range Amb. +3°C ...+130°C

Temperature adjustable range 0°C...+137°C

Accuracy / Resolution +/- 0,1°C / 0,1°C

Maximum heating time 9,5°C / min

Shaking frequency 200-1.500 rpm

Orbit 3 mm orbital

Dimensions (W x D x H) 220 x 330 x 109 mm

Capacity 2 exchangeable blocks

Weight 7 kg

Electrical heating power 350 W

Electrical supply 115/230 V, 50/60 Hz

Smart Control: 30 program steps, short mix, interval shaking

- Double sample volume: 2-block system
- Orbital shaking motion

## Double-Block Thermo Shaker MHL 23 Art.-no. 980623003









#### **Technical specification**

Temperature operation range Amb. +3°C ...+130°C

Temperature adjustable range 0°C...+137°C

Accuracy / Resolution +/- 0,1°C / 0,1°C

Maximum heating time 9,5°C / min

Shaking frequency 200-1.300 rpm

Orbit 3 mm orbital

Dimensions (W x D x H) 220 x 330 x 109 mm

Capacity 2 blocks

Weight 7 kg

Electrical heating power 350 W

Electrical supply 115/230 V, 50/60 Hz

Smart Control: 30 program steps, short mix, interval shaking

- Double sample volume: 2-block system
- · Orbital linear shaking motion: Ideal for small sample volumes

## Remote Software Art.-Nr. 300040013

You can use the Remote Control and Data Logging Software to regulate and control the devices. A USB connection to communicate with a PC is standard for all Thermo Shakers and BlockThermostats with Smart Control.


By using a script the device can be operated by remote control and process data of the device can be gained and documented in an Excel file.





brochure\_ditabis\_mixers\_EN\_2016\_01.indd 9 09-02-16 13:00

## **BLOCKTHERMOSTATS**

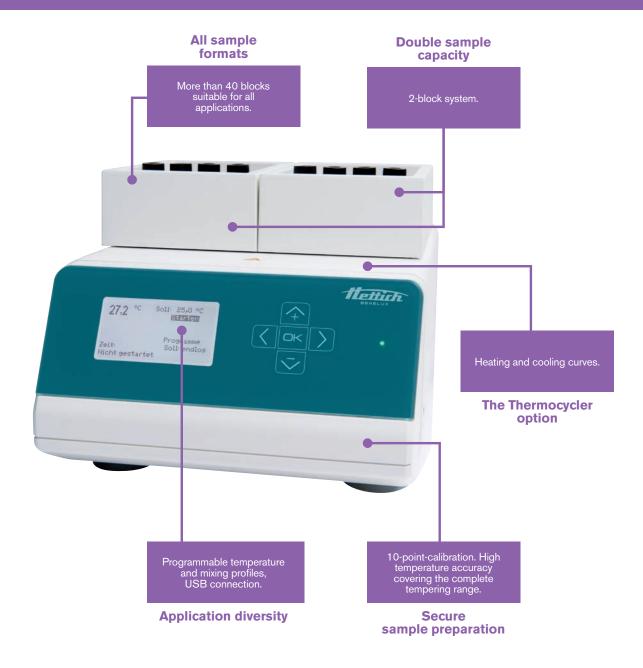

## Basic Double-BlockThermostat TH 21 Art.-no. 980923003







#### **Technical specification**

Temperature operation range	Amb. +3°C+130°C
Temperature adjustable range	0°C+137°C
Accuracy / Resolution	+/- 0,1°C / 0,1°C
Maximum heating time	9,5°C / min
Dimensions (W x D x H)	220 x 330 x 109 mm
Capacity	2 exchangeable blocks
Weight	3,5 kg
Electrical heating power	350 W
Electrical supply	115/230 V, 50/60 Hz
Easy Control Timer	19h 59Min

- Saving of time: Very fast heating rates >9,5°C/min
- Double sample volume: 2-block system

## Multifunctional Double-BlockThermostat TK 23 Art.-no. 980823003










Technical specification	
Temperature operation range	Amb16°C+90°C
Temperature adjustable range	-10°C+105°C
Accuracy / Resolution	+/- 0,3°C / 0,1°C
Maximum heating time	4°C / min
Maximum cooling time	7°C / min
Dimensions (W x D x H)	220 x 330 x 144 mm
Capacity	2 exchangeable blocks
Weight	7,5 kg
Electrical heating /cooling power	130 W
Electrical supply	115/230 V, 50/60 Hz
Smart Control	30 program steps

- Application diversity: Programmable temperature and mixing profiles, USB connection
- Secure sample preparation: 10-point-calibration

## **EXCHANGEABLE THERMOBLOCKS**

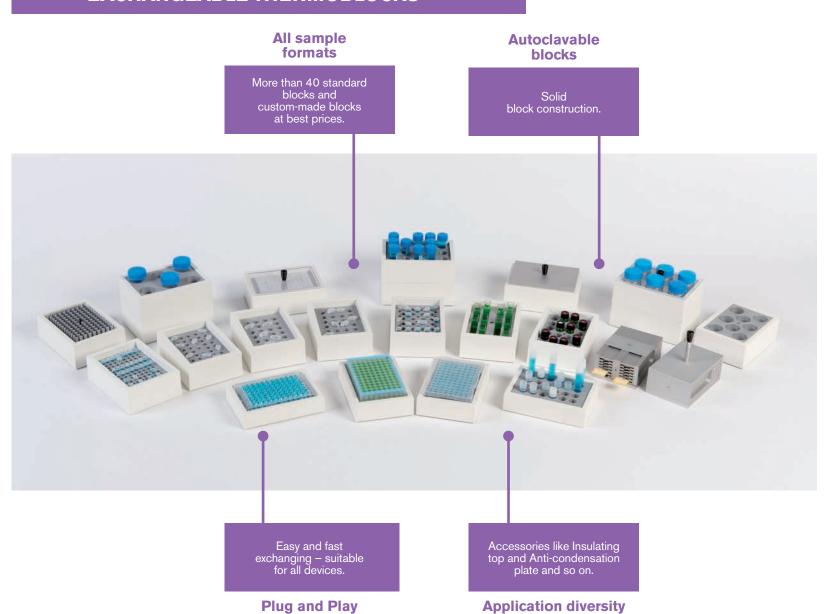

brochure\_ditabis\_mixers\_EN\_2016\_01.indd 12 09-02-16 13:00



Select the one applicable for you from more than 40 different exchangeable blocks. Quick and simple handling: they are simply inserted and fixed on top of the heating and cooling units. The blocks are suitable and exchangeable for all Thermo Shakers and BlockThermostats listed in this catalogue.


Our blocks have consistent outside dimensions of  $14,5 \times 10,2$  cm. The usable area here is  $12,5 \times 8,5$  cm. The height varies with each block.

#### For microtubes

















#### For sample tubes


























#### For centrifugal tubes













#### For deep-well plates







#### For PCR plates





#### For microtiter plates





#### For slides



#### For other applications












#### For own customization







#### **Accessories for Thermo Shakers & BlockThermostats**



Article no.	Article description
800013000	Block for PCR und microtier plates
800012900	Block for microtubes

• For blocks with micro tubes or test plates

• Aluminum plates quickly reach the block temperature and prevent condensation



Article no.	Article description
800012800	Insulating top for microtubes

Additional insulation provided by cover
 Quicker and even more uniform tempering of the samples



Article no.	Article description
800013800	Tempering cover for units with one block and high tubes
800013900	Tempering cover for units with two blocks and high tubes

• Especially for high tubes
• Reduces the influence of the surrounding temperature

#### Accessories for Thermo Shakers & BlockThermostats







- For blocks of micro tubes & PCR plates
- Parallel heating of the block or even quicker heating and prevention of condensation



Article no.	Artikelbeschreibung
800013100	Assembly rack for tubes 0.5 ml
800014300	Assembly rack for tubes 1.5 and 2.0 l

• Simple tool for the loading of sample tubes into the block

**Country Sets** 

Article no.	Country Sets
980000101	Country Set Europe
980000201	Country Set Switzerland
980000301	Country Set UK



## **Wolf Laboratories Limited**

www.wolflabs.co.uk

Tel: 01759 301142

Fax:01759 301143

sales@wolflabs.co.uk







Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.





