

67 Series Spectrophotometers





Contents

	page
67 Series Introduction	3
Cutting-edge user interface	4
Secure multi-user operation	5
Sampling Simplicity	6
Eight-cell and Six-cell Automation	7
Specifications	8

**67 SERIES SPECTROPHOTOMETERS
NOW WITH FULL 3
YEAR WARRANTY
INCLUDING LAMP**

Your Spectrophotometer

- Secure multi-user operation
- Colour touch screen display
- Save to SD/USB memory cards
- Protect and track data
- Enhance productivity

...Everyone's Spectrophotometer



The Jenway 67 Series Spectrophotometers are built on a solid foundation of high quality, sealed optics for optimum photometric performance.

Their cutting-edge user interface delivers the intuitive operation you have come to expect from Jenway instruments; while their operator-focus makes this advanced range of spectrophotometers fit to meet the demands of your laboratory, today and into the future.

With this series Jenway introduce Secure Multi-User Operation to protect the work of each designated user and enable full traceability of results. The range of plug-in accessories maintain flexibility and improve productivity.

Their high capacity internal, flash memory is complemented by external SD/USB memory cards that enable the 67 Series to transfer your spectrophotometer to another instrument, or to a computer for off-line working. Cloning a group of instruments with the same settings has never been easier.

Model 6700 covers the visible wavelength range from 320-1100nm, with a 4nm spectral bandwidth using a tungsten halogen light source.

Model 6705 covers the UV/visible wavelength range from 190-1100nm, with a 4nm spectral bandwidth using a pulsed xenon light source.

Model 6715 also covers the UV/visible wavelength range from 190-1100nm with a pulsed xenon light source. The enhanced 1.5nm spectral bandwidth of this model meets EP/USP requirements.

All three instruments have modes for photometrics, spectrum scanning, multi-wavelength analysis, kinetics and quantitation, giving direct concentration results against single or multi-point calibrations.

With extensive post measurement tools to ensure results are presented to your requirements the 67 Series also offers significant advances in data portability.

cutting-edge user interface

- Colour LCD with touch screen interface
- High capacity internal memory
- Sealed QWheel™ for cursor control
- Removable SD or SD/USB memory card

The durability of touch screen displays is proven daily by their use in commercial and domestic situations. With an expected life of 10 million cycles, the touch screen used on the 67 Series Spectrophotometers will last more than a lifetime. Impervious to most solvents, chemicals, foodstuffs and cosmetics, while sensitive to a gloved hand or stylus, this interface will be at home even in the most arduous environments.

A top quality colour TFT LCD is used to present results and graphics in a clear, unambiguous manner. Together, the touch screen and colour display work in harmony to give the fastest, most flexible instrument interface possible, while ensuring the operation of these units sets a benchmark for ease-of-use.



Where accurate cursor control is required - for instance, when selecting a data point on a spectrum scan – using the QWheel™ makes fine control easy and precise. Familiar to users of consumer electronics, this touch sensitive, sealed control forges the bond between operator and display.



The high capacity internal memory can be configured from 256MB, enabling over 1000 methods and results to be stored up to 2GB, storing more than 10,000 methods and results. This is complemented by similar capacities on the removable SD or SD/USB memory card.

secure multi-user operation

- Methods, data and settings secured by PIN codes
- Up to ten designated users + supervisor
- Tag methods with security levels
- Take away 'your spectro' on a memory card



Jenway has developed Secure Multi-User Operation for the many instruments that have to be shared by a number of users. When enabled, access to the instrument functions is controlled through a secure log-in procedure.

So that results can always be obtained (i.e. in an emergency, out of hours etc.) free operation is available at any time without access to stored data.

For maximum security PIN codes can be allocated to individuals, groups, laboratories or departments, restricting individuals' access to specific tests.

For further flexibility each method can be given three levels of security: Personal - where only the originator can access it: Public - giving access to all users: Read Only - methods can be accessed by all users but can only be modified by the originator.

Copying the SD card to the internal memory enables the easy cloning of multiple instruments with the same settings, ensuring common practice in related labs and speeding set-up in busy teaching establishments.

Saving your spectrophotometer to an SD/USB memory card enables the direct transfer of your work to a PC via a USB port. Data can be viewed, exported, saved or printed for generating reports and operating procedures.

sampling simplicity

- Automatic recognition of plug-in modules
- Temperature controlled cell holders
- Programmable sipper pump
- Single cuvette and test tube holders



The 67 Series spectrophotometers have been designed to enhance productivity while remaining flexible and adaptable.

Simply sliding in a new sampling accessory, that will automatically be recognised at power up, sets the instrument operating parameters and options to match its new functionality.

For precise control of sample temperature a peltier controlled cuvette holder is available in a compact sample chamber module, with no external components required. Temperature control to 0.1°C resolution from 20 to 50°C is possible.

A programmable sipper pump can also be fitted, enabling controlled sample volumes to be injected into micro and standard flow-through cuvettes. Air segmentation and rinse cycles can also be programmed for sensitive applications.

A peltier sipper module incorporates the features and functions of both these individual accessories. A full range of passive sample holders can also be easily fitted. These include the adjustable path length cuvette holder, (10 to 100mm), the universal test tube holder and single water heated cuvette holders.



Sampling accessories include (l to r) single cuvette holder, automatic eight position cuvette holder, sipper pump and peltier/sipper.

eight-cell and six-cell automation

- Auto measure / save / print
- Store multiple sample blanks
- Cuvette matching
- Parallel kinetics measurement

The automated eight and six-position cell holder accessories are the key to improved productivity in all modes of operation. Both accept standard 10mm path-length cuvettes while the six-position accessory has the added benefit of a water jacket for sample temperature control via an external circulating water bath.

Simply select the Automation option when creating a method, then choose to measure up to seven samples sequentially. The results will be saved or printed automatically while you prepare the next batch of samples. Up to 7000 samples can be measured in this way using multiple carousels, with just a simple prompt to swap them over as each set of measurements is completed.

Choose the multiple blanks option for methods that require individual sample blanks, for example; where turbidity, background colour or other interferences vary from sample to sample. Here the spectrophotometer will run a blank cycle and store the value for each position. The samples can then be prepared and the measure cycle run, when the stored blanks will be subtracted – ensuring the most accurate, corrected results.

For those detailed spectrum scans that would normally require expensive matched cuvettes, individual baselines can be stored for each cuvette fitted into the eight or six position cell holder, enabling the use of lower cost, un-matched cuvettes for most applications.

Multiple kinetics measurements can also be run in parallel by automatically staggering the time of measurement for each sample fitted in the cuvette changer.



Eight-position cell holder



Six-position cell holder



technical specification

Specification	6700	6705	6715
Light Source	Tungsten halogen	Xenon	Xenon
Optics	Sealed, MgF Coated, Single Beam	Sealed, MgF Coated, Split Beam	Sealed, MgF Coated, Split Beam
Spectral Bandwidth	4nm	4nm	1.5nm
Stray Light	<0.05%T at 340nm	<0.05%T at 220nm	<0.05%T at 220nm
Wavelength Range (nm)	320 to 1100	190 to 1100	190 to 1100
Wavelength Resolution (nm)	0.1	0.1	0.1
Wavelength Accuracy (nm)	±1.0nm	±1.0nm	±1.0nm
Wavelength Repeatability (nm)	±0.2nm	±0.2nm	±0.1nm
Photometric Ranges	-0.300 to 3.000A & 0 to 199.9%T	-0.300 to 3.000A & 0 to 199.9%T	-0.300 to 3.000A & 0 to 199.9%T
Photometric Resolution	0.001A & 0.1%T	0.001A & 0.1%T	0.001A & 0.1%T
Photometric Accuracy	±0.005 at 1A	±0.005 at 1A	±0.005 at 1A
Photometric Stability	<0.001A per Hour	<0.001A per Hour	<0.001A per Hour
Concentration Range	Up to 99999	Up to 99999	Up to 99999
No of Standards	20 with up to 5 replicates of each	20 with up to 5 replicates of each	20 with up to 5 replicates of each
Curve Fit Algorithms	Linear, Quadratic and Cubic Functions	Linear, Quadratic and Cubic Functions	Linear, Quadratic and Cubic Functions
Multi-wavelength Data Points	Up to 4 Wavelengths	Up to 4 Wavelengths	Up to 4 Wavelengths
Calculations	Difference and ratio	Difference and ratio	Difference and ratio
Kinetics Time Limits	0 to 9999 Secs	0 to 9999 Secs	0 to 9999 Secs
Kinetics Calibration	Standard or factor	Standard or factor	Standard or factor
Scan Speed	1500nm/minute at 0.1nm data steps	1500nm/minute at 0.1nm data steps	1500nm/minute at 0.1nm data steps
Post Scan Analysis	Peak/Valley pick, Area, Zoom, Wavelength Table, Overlays, Derivatives, Smoothing	Peak/Valley pick, Area, Zoom, Wavelength Table, Overlays, Derivatives, Smoothing	Peak/Valley pick, Area, Zoom, Wavelength Table, Overlays, Derivatives, Smoothing
Configuration	Secure Multi-User or Free access	Secure Multi-User or Free access	Secure Multi-User or Free access
No of Users	10 + Supervisor	10 + Supervisor	10 + Supervisor
No of Methods	>1000 at 256MB to >10000 at 2GB internal memory	>1000 at 256MB to >10000 at 2GB internal memory	>1000 at 256MB to >10000 at 2GB internal memory
Results Storage	>1000 at 256MB to >10000 at 2GB internal memory	>1000 at 256MB to >10000 at 2GB internal memory	>1000 at 256MB to >10000 at 2GB internal memory
File Output	CSV or BMP	CSV or BMP	CSV or BMP
Removable Media	SD, SD/USB & MM memory card options from 256MB to 2GB	SD, SD/USB & MM memory card options from 256MB to 2GB	SD, SD/USB & MM memory card options from 256MB to 2GB
Interface	USB, Centronics, Analogue	USB, Centronics, Analogue	USB, Centronics, Analogue
PC Software	Supplied on CD ROM with USB Interface Cable	Supplied on CD ROM with USB Interface Cable	Supplied on CD ROM with USB Interface Cable
Mains Supply	100 to 230V ac 50 or 60Hz	100 to 230V ac 50 or 60Hz	100 to 230V ac 50 or 60Hz
Size	490 x 390 x 220 mm	490 x 390 x 220 mm	490 x 390 x 220 mm
Weight	9.0Kg (14Kg packed)	9.0Kg (14Kg packed)	9.0Kg (14Kg packed)

Bibby Scientific Qualoupe Lite

Data Management Software

Bibby Scientific's new data management software offers a powerful combination of functional but simple applications to store and retrieve laboratory test results and information.

Qualoupe Lite is an ideal data storage solution for research groups, commercial laboratories and small to medium enterprises. Qualoupe Lite has an in-built option to change the displayed text to English, French or German language.



Qualoupe Lite Data Management Software

Sample and Result Entry

- Automatic/Manual lot numbers
- Add/Remove Test Methods
- Record Test Results and Data

Material Specifications

- Multiple Specifications
- Pass/Fail Limits
- Defined Test Suites

Test Methods


- Text / Numeric / Defined Result Lists
- Define Specified Method Calculations

Results – Recall and Report

- Powerful Database Search and Filter Options
- Printout Single or Multiple Report Records

Instrument Interface Software

- Direct Transfer of Results and Data from Jenway 67 Series Spectrophotometer
- Connect to Instrument or External SD memory

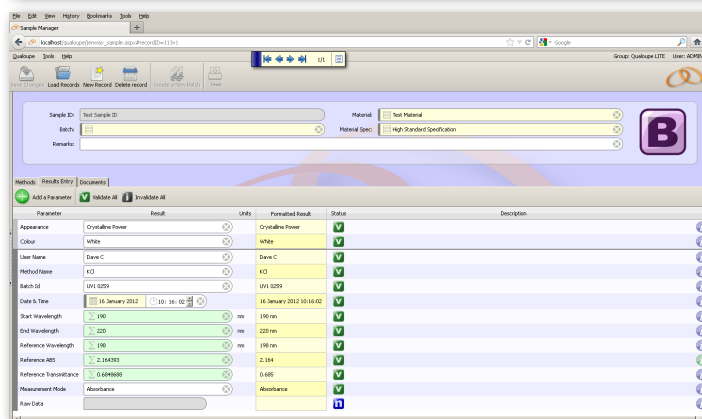

Ordering Information

Product Code	Description
QUALITE	Qualoupe Lite Data Management Software



Wolf Laboratories Limited

www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk



Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

