


# 2xOF302-40B (oil-less)

Voltage	V	100	100	120	200	200	230	230	3x400	3x440		
Frequency	Hz	50	60	60	50	60	50	60	50	60		
Motor	HP	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2		
	kW	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9		
Displacement	l/min	216	276	276	216	276	216	276	216	276		
	CFM	7.63	9.75	9.75	7.63	9.75	7.63	9.75	7.63	9.75		
FAD @ 8 bar	l/min	76	88	88	76	88	76	88	76	88		
	CFM	2.68	3.11	3.11	2.68	3.11	2.68	3.11	2.68	3.11		
Max. pressure	bar	8	8	8	8	8	8 <sup>1)</sup>	8 <sup>1)</sup>	8	8		
	psi	120	120	120	120	120	120 <sup>1)</sup>	120 <sup>1)</sup>	120	120		
Max. current	A	15.0	17.4	13.2	8.2	9.2	6.8	8.2	2.8	2.8		
Tank size	litres	40	40	40	40	40	40	40	40	40		
	gallon	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6		
Weight	kg	46	46	46	46	46	46	46	46	46		
	lbs	101	101	101	101	101	101	101	101	101		
Noise level	dB(A)/1m	68	69	69	68	69	68	69	68	69		
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
Duty cycle		100%	100%	100%	100%	100%	100%	100%	100%	100%		

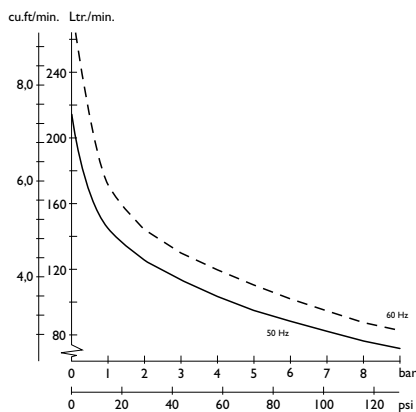

Dimensions (l x w x h)  
420 x 540 x 620 mm / 16 4/8 x 21 2/8 x 24 3/8 inch

<sup>1)</sup> Available for operation at a maximum pressure of 10 bar / 145 psi upon request. Please note that operation at higher pressure will influence the lifetime.

Technical modifications reserved

**JUN-AIR**®





**Wolflabs**

# Wolf Laboratories Limited

[www.wolflabs.co.uk](http://www.wolflabs.co.uk)

Tel: 01759 301142

Fax: 01759 301143

[sales@wolflabs.co.uk](mailto:sales@wolflabs.co.uk)



**Use the above details to contact us if this literature doesn't answer all your questions.**

**Pricing on any accessories shown can be found by keying the part number into the search box on our website.**

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

