


# I2-40 (oil-lubricated)

Voltage	V	100	100	120	200	200	230	230				
Frequency	Hz	50	60	60	50	60	50	60				
Motor	HP	1.08	1.08	1.08	0.92	0.92	0.92	0.92				
	kW	0.80	0.80	0.80	0.68	0.68	0.68	0.68				
Displacement	l/min	100	120	120	100	120	100	120				
	CFM	3.53	4.24	4.24	3.53	4.24	3.53	4.24				
FAD @ 8 bar	l/min	64	74	74	64	74	64	74				
	CFM	2.26	2.61	2.61	2.26	2.61	2.26	2.61				
Max. pressure <sup>1)</sup>	bar	8	8	8	8	8	8	8				
	psi	120	120	120	120	120	120	120				
Max. current	A	12.4	12.4	12.4	5.8	5.8	5.8	5.8				
Tank size	litres	40	40	40	40	40	40	40				
	gallon	10.6	10.6	10.6	10.6	10.6	10.6	10.6				
Weight	kg	48	48	48	48	48	48	48				
	lbs	106	106	106	106	106	106	106				
Noise level	dB(A)/1m	48	48	48	48	48	48	48				
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes				
Duty cycle		50%	50%	50%	50%	50%	50%	50%				

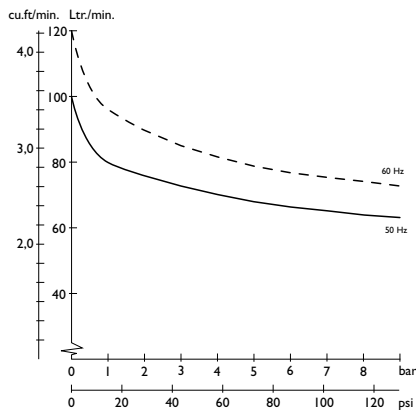

Dimensions (l x w x h)  
556 x 446 x 581 mm / 21,8 x 17,5 x 22,8 inch

<sup>1)</sup> Higher pressure available upon request

Technical modifications reserved



**JUN-AIR**®



# Wolf Laboratories Limited

[www.wolflabs.co.uk](http://www.wolflabs.co.uk)

**Wolflabs**

Tel: 01759 301142

Fax: 01759 301143

[sales@wolflabs.co.uk](mailto:sales@wolflabs.co.uk)



**Use the above details to contact us if this literature doesn't answer all your questions.**

**Pricing on any accessories shown can be found by keying the part number into the search box on our website.**

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

