

# **Diaphragm Pumps for Air, Gases and Vapours**



# Series LABOPORT® N 811 K\_.18 Pumps

Series N 811 diaphragm pumps are single-head, dry-running devices used in a wide range of laboratory applications. They transfer, compress and pump down without contamination. The heart of these very compact pumps is a KNF structured diaphragm. This patented diaphragm was stress-optimized using the Finite Elements method. As a result, we were able to make the pumps smaller while increasing the service life of the diaphragm.

The pumps are available in various versions differing in the materials which contact the media.

#### Material in contact with the pumped media

| Type/Order No. | Pump head | Diaphragm   | Valves |
|----------------|-----------|-------------|--------|
| N 811 KN.18    | PPS       | EPDM        | FPM    |
| N 811 KT.18    | PPS       | PTFE-coated | FFPM   |

# LABOPORT® Mini Diaphragm Vacuum Pumps and Compressors

#### **Technical features:**

- 100% oil-free transfer
- Pure transferring, evacuation and compression of gases
- Version for slightly aggressive or corrosive gases and vapours
- Maintenance-free
- Environmentally friendly
- High level of gas tightness.

| Technical data:                    | N 811 KN.18 | N 811 KT.18 |  |
|------------------------------------|-------------|-------------|--|
| Delivery (I/min) <sup>1)</sup>     | 11.5        | 11.5        |  |
| Ultimate vacuum (mbar abs.)        | 240         | 290         |  |
| Operating pressure (bar g)         | 2           | 2           |  |
| Connectors for tube (mm)           | ID 6        | ID 6        |  |
| Permissible gas and                |             |             |  |
| ambient temperature                | +5+40 °C    | +5+40 °C    |  |
| Mains                              | 230V/50Hz   | 230V/50Hz   |  |
| Motor protection                   | IP 20       | IP 20       |  |
| Power P <sub>1</sub>               | 65 W        | 65 W        |  |
| Operating current                  | 0.8 A       | 0.8 A       |  |
| Weight                             | 2.5 kg      | 2.5 kg      |  |
| Dimensions L x H x W (mm)          | 187/157/90  | 187/157/90  |  |
| With thermal switch and power fuse |             |             |  |

Motors with other voltages and frequencies on request.

# **Accessories and spare parts**

| Details                       | Order No.  |
|-------------------------------|--|
| G 1/8                         | 000345   |
| G 1/8                         | 000346   |
| G 1/8, PVDF, for tube ID 6 mm | 014052   |
| pressure side                 | 001786   |
| suction side                  | 001787   |
| for N 811 KN.18               | 044066   |
| for N 811 KT.18               | 044067   |
|                               | G 1/8 G 1/8 G 1/8, PVDF, for tube ID 6 mm pressure side suction side for N 811 KN.18 |


<sup>1)</sup> at atm. pressure




# **Diaphragm Pumps for Air, Gases and Vapours**

## **Dimensions and performance characteristics**


### Pump down time for 5 I receiver

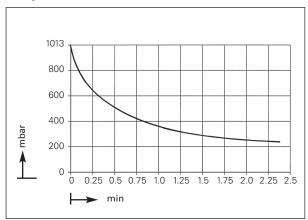


#### **Performance characteristics**

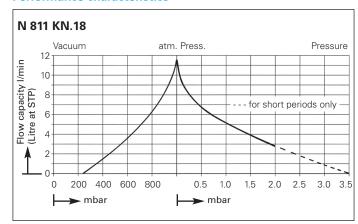

#### **Performance characteristics**

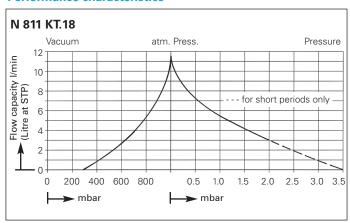

#### **Dimensions (mm)**

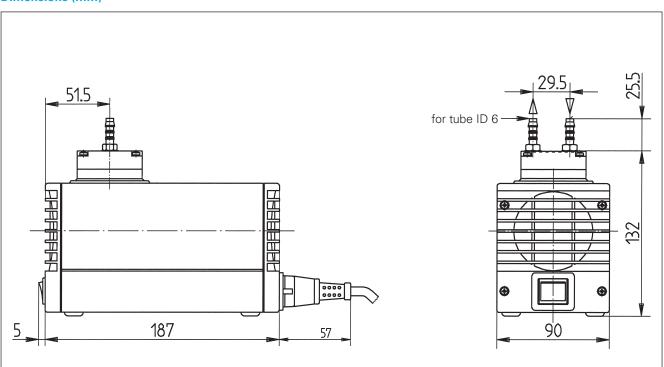



# **Wolf Laboratories Limited**

www.wolflabs.co.uk

Tel: 01759 301142

Fax:01759 301143

sales@wolflabs.co.uk







Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.





