

# CHILLER

## C 900

### DATA SHEET E 500



#### Technical features


- Low energy consumption
- Ventilation slots at the front offers the possibility to place several units side by side
- Safe operation via splash-proof membrane keypad with LED temperature display
- Filling level indicator for a easy filling

#### Technical data

Working temperature range [°C]	-10 to +40
Temperature stability [°C]	± 0.5
Temperature control	PID temperature control
Setting / display resolution [°C]	0.1
Temperature display	LED
Cooling capacity (Medium: Water/glycol (50:50) mixture)	
20 °C	0.25 kW
10 °C	0.22 kW
5 °C	0.21 kW
0 °C	0.18 kW
-5 °C	0.09 kW
Pump flow rate [l/min]	15
Pump pressure [bar]	0.35

Pump connections	M10x1
Hose connectors [mm]	ID 8/10
Filling volume [liters]	1.7 - 2.6
Refrigerant	R134a
Ambient temperature [°C]	+5 to +40
Dimensions W x H x D [mm]	235 x 520 x 400
Weight [kg]	27
Included with each unit	2 hose connectors for tubing ID 8 and ID 10
Cooling of compressor	Air
Max. operating current [A]	3.0
Available voltages	230 V/50 Hz

#### Combination possibilities

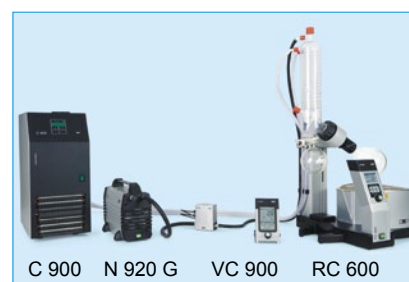



**Wolflabs**

# Wolf Laboratories Limited

[www.wolflabs.co.uk](http://www.wolflabs.co.uk)

Tel: 01759 301142

Fax: 01759 301143

[sales@wolflabs.co.uk](mailto:sales@wolflabs.co.uk)



**Use the above details to contact us if this literature doesn't answer all your questions.**

**Pricing on any accessories shown can be found by keying the part number into the search box on our website.**

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

