

LMS

Series 2

Cooled Incubators

The LMS Cooled Incubator is a reliable and accurate temperature controlled cabinet (-10°C to +50°C) which has proved its worth over many years in laboratories both in the UK and overseas.

The design of the purpose built incubator facilitates the addition of optional extras to provide greater flexibility for individual use, making it suitable for a wide range of applications including:-

- The study of growth patterns of plants and insects
- B.O.D. Tests
- Seed germination & vernalisation
- Tissue culture
- Enzyme testing
- Serum studies
- Immunology
- Fruit fly culture
- Sample storage
- Product shelf life tests

Models

- 210 (135 litre) – freestanding
- 220 (200 litre) – freestanding
- 230 (290 litre) – freestanding
- 240 (420 Litre) - freestanding

Construction

- Exterior – white stove enamelled mild steel
- Interior – high impact ABS plastic
- Insulation – foamed polyurethane for optimum results



Two Year Guarantee

Design

- Digital control with digital readout
- Fan assisted air circulation via premixing chamber
- Full P.I.D. heating control to ensure stable internal temperature
- Pre-set 70C safety cutout for total cabinet protection
- Electronics RF and TV suppressed
- Hermetically sealed refrigeration system
- Self-evaporating condensate drip-tray
- Doorlock
- White plastic coated wire shelves
- RS 232 interface


Operation

- Controls easy to read and simple to use
- Temperature range -10C to +50C (excluding interior illumination) with average (excluding interior illumination) with average workload
- Temperature set by direct reading digital controller

Optional Extras

- Automatic dual temperature control
- Interior Fluorescent/u.v. lighting
- Inner clear perspex door
- Built in chart recorder
- Manual high/low temperature audible and visual alarm system with safety cut-out
- Automatic Defrost
- Programmable audible alarm
- Access porthole
- Special evaporator for corrosive conditions
- Internal socket outlet
- RS485 interface
- Fully programmable controller
- Configuration software for Windows (for use with fully programmable controller)
- Pre-programming service, up to 5 different programs

Model		210	220	230	240
External	Height	945	1370	1800	1770
Dimensions	Width	600	600	600	750
	Depth	660	640	650	780
Capacity	(Litres)	135	200	290	420
Shelf Size	(MM)	545x418	545x418	495x435	640x550
Number of Shelves		3	4	4	5
Unladen Weight		45Kgs	61Kgs	76Kgs	92Kgs
Internal	A	735	1045	1445	1450
	B	425	425	440	570
Dimensions	C	545	545	505	655
	D	340	320	310	430
(MM)	E	190	185	205	200
	F	85	105	135	145
	G	125	145	125	140
	H	470	470	470	585
	K	285	285	310	400
	L	545	860	1240	1225

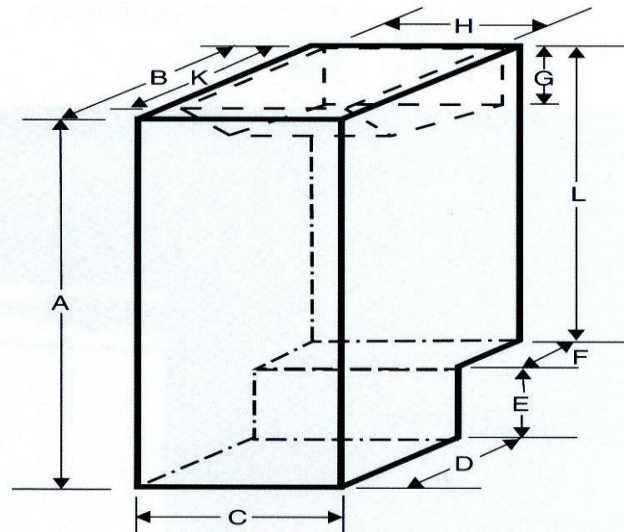

LMS Limited reserve the right to amend the specification of all models without prior notice in the light of changing user techniques.

The standard voltage is 240v 50Hz but other volts/cycles are available.



Wolflabs

Wolf Laboratories Limited

www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk



Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

