

# Microplate Mixers

DLAB Microplate Mixer is used for holding single or double microplates. The compact shape of MX-M Microplate Mixer occupies less bench space and makes the storage easier. It is widely used in life sciences including microbiology, cell and molecular biology, immunology and biotechnology.

## MX-M Microplate Mixers

### Features:

- A wide range of speed from 0 to 1500rpm
- Used for various mixing applications with optional adapters
- Maintenance-free brushless DC motor



### PS1.1 Universal top plate

Used with tube adapters

**Cat. No.**18900067



### VT1.3.1 tube adapter

for 48 holes test tubes, Ø6mm

**Cat. No.**18900020



### VT1.3.2 tube adapter

for 15 holes test tubes, Ø10mm

**Cat. No.**18900021



### VT1.3.3 tube adapter

for 12 holes test tubes, Ø12mm

**Cat. No.**18900022



### VT1.3.4 tube adapter

for 8 holes test tubes, Ø16mm

**Cat. No.**18900023



### VT1.3.5 tube adapter

for 8 holes test tubes, Ø20mm

**Cat. No.**18900024



Brushless DC motor




Wide range of accessories



### PS1.2 Microplate clamp

**Cat. No.**18900042

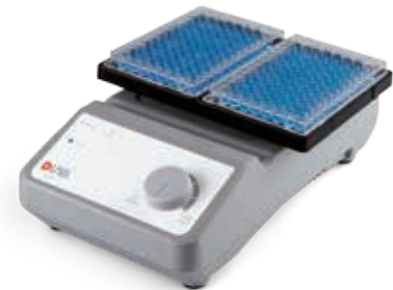

### MXM-116

Double microplate clamps

**Cat. No.**18900079

### Specifications

	MX-M
Shaking movement	Orbital
Orbital diameter	4.5mm
Max. shaking weight (with accessory)	0.5kg
Motor type	Brushless DC motor
Motor rating input	18W
Motor rating output	10W
Speed range	Single microplate: 0-1500rpm Double microplate : 0-1000rpm
Speed display	Scale
Voltage	100-240V,50/60Hz
Power	20W
Dimension	260×150×80mm
Weight	3kg
Permissible ambient temperature and humidity	5-40°C, 80%RH
Protection class	IP21



# Wolf Laboratories Limited

[www.wolflabs.co.uk](http://www.wolflabs.co.uk)

**Wolflabs**

Tel: 01759 301142

Fax: 01759 301143

[sales@wolflabs.co.uk](mailto:sales@wolflabs.co.uk)



**Use the above details to contact us if this literature doesn't answer all your questions.**

**Pricing on any accessories shown can be found by keying the part number into the search box on our website.**

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

