

## IncuSafe

CO<sub>2</sub> Incubators

49 L



MCO-5AC-PE



### Personal-size compact CO<sub>2</sub> Incubator

Patient-specific, compact design, triple stackable CO<sub>2</sub> Incubator. Provides precise control of CO<sub>2</sub> concentration and accurate, uniform, and highly responsive temperature control within the chamber. During cell culturing, the inCu-saFe germicidal interior and SafeCell UV lamp work continuously to prevent contamination.

#### Controlled & Regulated Environment

InCu-saFe and SafeCell UV both function to prevent contamination. The Direct Heat and Air Jacket System regulates the temperature whilst the TC sensor controls the CO<sub>2</sub> level.

#### Stackable Design

The compact design of the MCO-5AC CO<sub>2</sub> incubator allows up to three units to be stacked, increasing the interior volume without the need for additional floor space.

#### Monitoring & Control

Optimal visibility and control of the interior conditions of the incubator can be achieved through use of its accurate digital display and an easy-to-operate control-panel.



#### Optimum Cell Growth

Outstanding quality and performance for successful cell growth, optimal results and reproducibility.



#### Individual Cell Culturing

Compact and stackable these incubators are ideal for individual cell cultures from patient samples or small scale research projects.



#### Intuitive Usability

Control and visibility of the internal conditions, such as CO<sub>2</sub> level and temperature, are easy with the MCO-5AC CO<sub>2</sub> incubator.

# IncuSafe CO<sub>2</sub> Incubators



## Direct Heat and Air Jacket System


Achieves accurate, uniform, and highly responsive temperature control within the chamber, providing exceptional uniformity and rapid recovery after door-opening.

## TC CO<sub>2</sub> Sensor

The incubator's thermal conductivity sensor and P.I.D control system delivers reliable and repeatable CO<sub>2</sub> control. The CO<sub>2</sub> setpoint is adjustable from 0 to 20%.

## Active Background Decontamination

The inCu-saFe copper-enriched stainless steel alloy interior offers the germicidal properties of copper and the durability of stainless steel. The optional, isolated, SafeCell UV lamp decontaminates circulating air and water in the humidifying pan, without harming cultured cells.

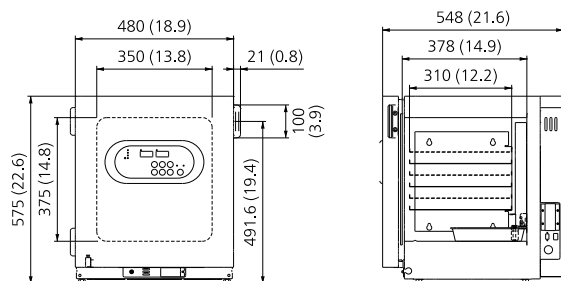

Model Number	MCO-5AC-PE	MCO-5ACUV-PE
External Dimensions (W x D x H) <sup>1)</sup>	mm	480 x 548 x 575
Internal Dimensions (W x D x H)	mm	350 x 378 x 375
Volume	liters	49
Net Weight	kg	49
<b>Performance</b>		
Temperature Control Range & Fluctuation	°C	AT +5 - +50, ±0.1
Temperature Uniformity <sup>2)</sup>	°C	±0.25
CO <sub>2</sub> Control Range & Fluctuation <sup>3)</sup>	%	0 - 20, ±0.15
Humidity Level & Fluctuation	%RH	95, ±5
<b>Control</b>		
Temperature Sensor		Thermistor
CO <sub>2</sub> Sensor		TC
Display		LED
<b>Construction</b>		
Exterior Material		Painted Steel
Interior Material		Stainless Steel Copper-Enriched Alloy
Insulation Material		Rigid polyurethane foamed-in place
Heating Method		Direct Heat & Air Jacket System
Outer Door	qty	1
Outer Door Lock		N/A
Field Reversible Door		Included
Inner Door	qty	1
Shelves	qty	3 x Stainless Steel Copper-enriched Alloy
Shelf Dimensions (W x D x H)	mm	310 x 310 x 12
Max. Load per Shelf	kg	4
Max. Shelf Capacity	qty	6
Access Port	qty	1
Access Port Position		Rear Upper Left
Access Port Diameter	∅ mm	30
<b>Alarms</b> (R = Remote Alarm, V = Visual Alarm, B = Buzzer Alarm)		
Power Failure		N/A
Out of Temperature Setting		V-B-R
High Temperature		V-B-R
Out of CO <sub>2</sub> Setting		V-B-R
Door open		V
<b>Electrical and Noise Level</b>		
Power Supply	V	230
Frequency	Hz	50
Noise Level <sup>4)</sup>	dB	24
<b>Options</b>		
SafeCell UV <sup>®</sup> System	MCO-19UVS-PE	Standard
Multiple Inner Doors		N/A
CO <sub>2</sub> Gas Pressure Regulator		MCO-100L-PW
Automatic CO <sub>2</sub> Cylinder Changeover System		MCO-5GC-PW
InCu-saFe <sup>®</sup> Shelf		MCO-30ST-PW
InCu-saFe <sup>®</sup> Half Tray System		N/A
Stacking Kit		Standard
Roller Base		MCO-5RB-PW
<b>Optional communication systems<sup>5)</sup></b>		
Ethernet interface (LAN)		N/A
Digital interface (RS232C/RS485)		MTR-480-PW

<sup>1)</sup> Exterior dimensions of main cabinet only, excluding handle and other external projections

<sup>2,3)</sup> Ambient temperature 25°C, setting 37°C, CO<sub>2</sub> 5%, O<sub>2</sub> 5%, no load

<sup>4)</sup> Nominal value

<sup>5)</sup> MCO-5AC series can only be fitted with one communications interface.



**Wolflabs**

# Wolf Laboratories Limited

[www.wolflabs.co.uk](http://www.wolflabs.co.uk)

Tel: 01759 301142

Fax: 01759 301143

[sales@wolflabs.co.uk](mailto:sales@wolflabs.co.uk)



**Use the above details to contact us if this literature doesn't answer all your questions.**

**Pricing on any accessories shown can be found by keying the part number into the search box on our website.**

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

