



Thermo Scientific Revco High-Performance Laboratory Refrigerators and Freezers

**Designed for your clinical, diagnostic
and research needs**

REFRIGERATORS

LABORATORY

4



CHROMATOGRAPHY

6



BLOOD BANK

7



PHARMACY

8



FLAMMABLE MATERIAL

9



FREEZERS

LABORATORY

10



PLASMA

12



ENZYME

13



FLAMMABLE MATERIAL

14



Thermo Scientific™ Revco™ High-Performance Laboratory Refrigerators and Freezers

It's a cold hard fact:


Temperature variation can have an impact on the viability of samples and the efficacy of reagents. These variations can shorten product shelf life, degrade enzymes and reduce vaccine effectiveness. Therefore, it's important to choose a high-performance refrigerator or freezer that has been designed for the demanding standards of the clinical and laboratory environment.

We continually search for ways to enhance our products and processes responsibly:

- Reduce the use of refrigerants in our cold storage equipment
- Use solvent-free, paint technology
- All of our high-performance refrigerators and freezers are manufactured in a zero waste to landfill facility
- Fluorescent lighting in our refrigerators replaced with mercury-free, LED lights

Microprocessor-Based Controller

simplifies operation, improves reliability

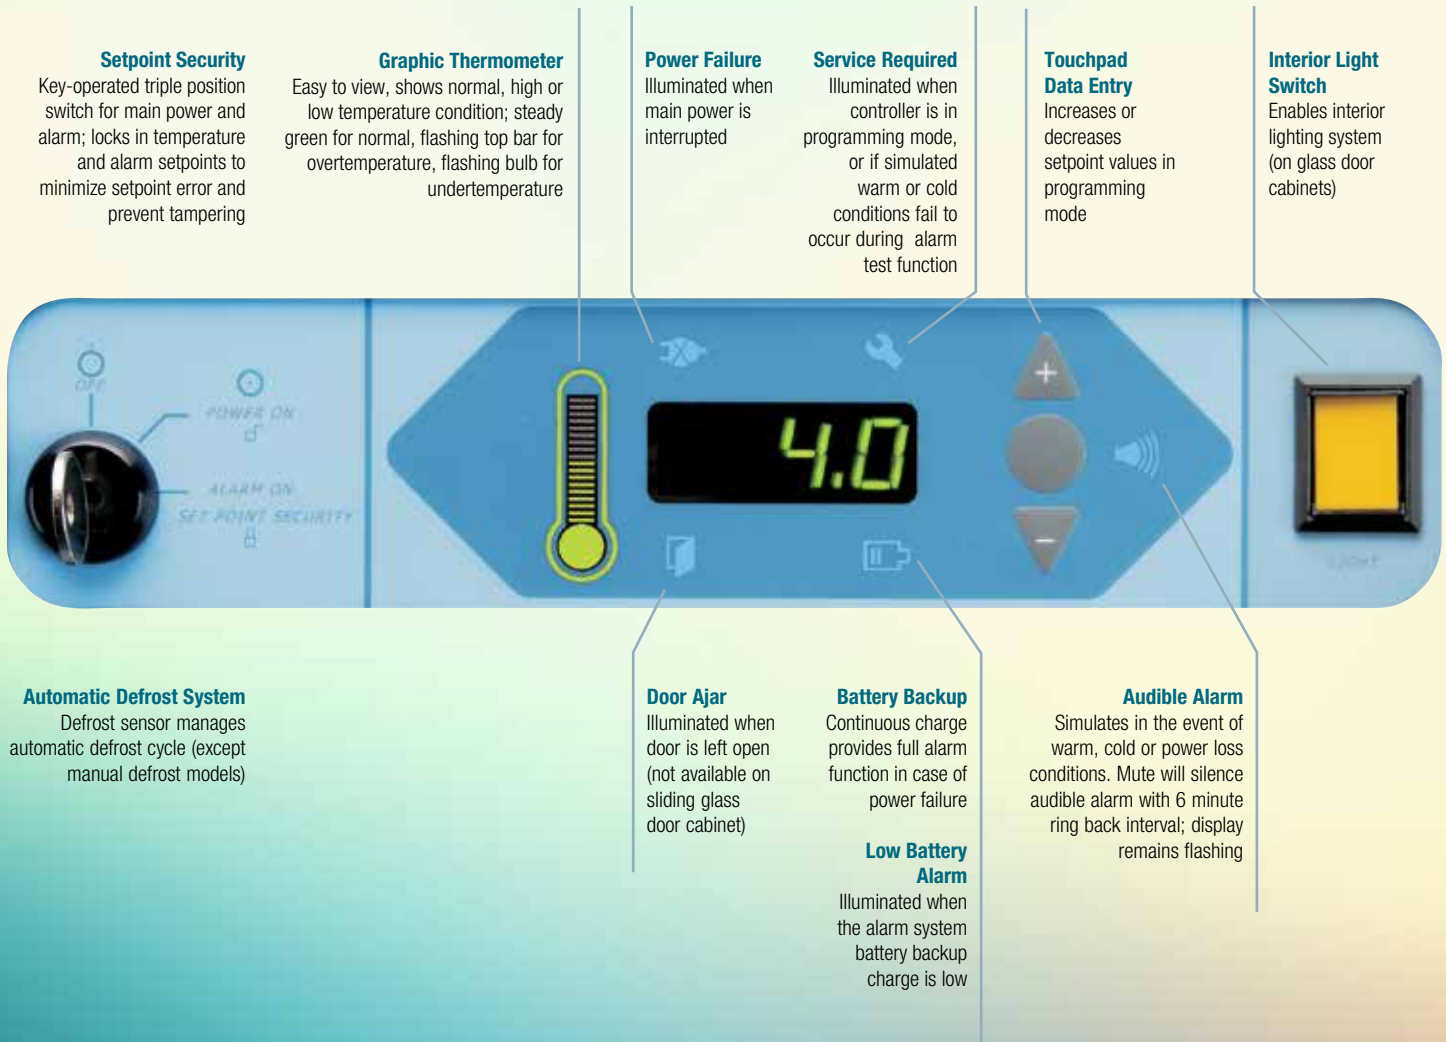

Our bright, easy to read display lets you know at-a-glance if your unit is running within range. Visual and audio alarms are designed to alert you in the event of a problem. Immediate access to high and low temperature parameters with the press of a button.

Touchpad Scan

Changes main display; also used to access various programming and service functions (alarm mute, recall 6 minutes).

Digital Display

Indicates cabinet temperature during normal operation, flashes during alarm condition or setpoint adjustment. Displays other values with touchpad sequence.

Service Parameters

Touchpad sequence allows override access to control function defaults for troubleshooting functions.



Biologics

Diagnostic
Kits &
Reagents

Industrial
Testing

Molecular
Biology

Vaccines
& Pharma

Clinical
Applications

Laboratory Refrigerators

Our Revco **high-performance, laboratory refrigerators** are available in a wide range of cabinet sizes to fit a variety of storage requirements and laboratory footprints.



Would you like to customize your glass door refrigerator?

See page 17 for options and accessories.

- **Forced air circulation for uniform temperature at all shelf levels**
- **Heat-free defrost for maximum uniformity**
- **Choice of glass or solid doors**
- **Four casters, for easy mobility; the front two are lockable**
- **1" (2.5cm) insulated access port**
- **Bright, LED interior lighting**
- **Adjustable, epoxy-coated wire shelves are standard (optional drawers)**
- **Keyed on/off switch with setpoint security**
- **Self-closing door with 90° stop to assist with inventory loads (except sliding glass door REL4504 model)**
- **Built-in remote alarm contacts**
- **Optional +5°C setpoint can be customized for users validating lab refrigerators in the +2 to +8°C setpoint (not available on 45 cu. ft. sliding door or 78 cu. ft. trip door models; order option 7508TA with your lab**

Thermo Scientific Revco High-Performance Laboratory Refrigerators With Glass Doors

Temperature Range: +1°C to +8°C, factory preset to +4°C (auto defrost) Optional +5°C setpoint available (order option 7508TA)

Model No.	Cu. Ft. (L)	Voltage (Hz)	Certification	Plug	Cabinet	Door	Adjustable Shelves	Int. Dimensions* H x D x W inches (mm)	Ext. Dimensions* H x D x W inches (mm)	Ship Weight lb (kg)
RGL404A	4.9	115 (60)	UL	NEMA 5-15	undercounter	single	3	20.0 x 20.5 x 20.0	33.4 x 26.0 x 24.0	220
RGL404D	(133)	208/230 (60)	UL	NEMA 6-15				(508 x 521 x 508)	(850 x 660 x 610)	(100)
RGL404V		230 (50)	CE	European						
RGL404W†		230 (50)	CE	U.K.					Exterior height before caster installation.	
RGL1204A	11.5	115 (60)	UL	NEMA 5-15	space saver	single	4	52.4 x 21.75 x 20.0	73.6 x 29.4 x 24.0	280
RGL1204D	(326)	208/230 (60)	UL	NEMA 6-15				(1331 x 553 x 508)	(1869 x 748 x 610)	(127)
RGL1204V		230 (50)	CE	European						
RGL1204W†		230 (50)	CE	U.K.						
RGL2304A	23.3	115 (60)	UL	NEMA 5-15	upright	single	4	58.0 x 29.0 x 24.0	79.2 x 37.2 x 28.0	370
RGL2304D	(659)	208/230 (60)	UL	NEMA 6-15				(1473 x 737 x 610)	(2012 x 945 x 711)	(168)
RGL2304V		230 (50)	CE	European						
RGL2304W†		230 (50)	CE	U.K.						
RGL3004A	29.2	115 (60)	UL	NEMA 5-15	upright	single	4	58.0 x 29.0 x 30.0	79.2 x 37.2 x 34.0	435
RGL3004D	(826)	208/230 (60)	UL	NEMA 6-15				(1473 x 737 x 762)	(2012 x 945 x 864)	(197)
RGL3004V		230 (50)	CE	European						
RGL3004W†		230 (50)	CE	U.K.						
REL4504A	45.8	115 (60)	UL	NEMA 5-15	upright	double	8	58.0 x 26.0 x 52.5	79.1 x 34.5 x 56.5	670
REL4504D	(1297)	208/230 (60)	UL	NEMA 6-15		sliding		(1473 x 660 x 1334)	(2010 x 876 x 1435)	(304)
REL4504V		230 (50)	CE	European						
REL4504W†		230 (50)	CE	U.K.						
RGL5004A	51.1	115 (60)	UL	NEMA 5-15	upright	double	8	58.0 x 29.0 x 52.5	79.2 x 37.2 x 56.5	585
RGL5004D	(1447)	208/230 (60)	UL	NEMA 6-15				(1473 x 737 x 1334)	(2012 x 945 x 1435)	(265)
RGL5004V		230 (50)	CE	European						
RGL5004W†		230 (50)	CE	U.K.						
RGL7504A	78.8	115 (60)	UL	NEMA 5-15	upright	triple	12	58.0 x 29.0 x 81.0	79.2 x 37.2 x 85.0	805
RGL7504D	(2231)	208/230 (60)	UL	NEMA 6-15				(1473 x 737 x 2057)	(2012 x 945 x 2159)	(365)
RGL7504V		230 (50)	CE	European						
RGL7504W		230 (50)	CE	U.K.						

* Published interior volumes are nominal; useable cu.ft. (L) capacities may be offset by shelves, drawers, blower coils, or cabinet protrusions. For specific cabinet dimensions and allowances, or for verification of clearance tolerances, contact our sales representative. Product performance may be affected by ambient temperature conditions, humidity conditions, sample loading preferences, and frequency of door openings. Contact our sales representative for specific inquiries regarding your application. 4.7 cu. ft. exterior dimensions are without casters.

† Due to differences in building wiring regulations in Australia and New Zealand, the current draw for the W-voltage units rated less than 10A may utilize a 10A circuit breaker. This rating only applies to Australia and New Zealand. Confirm the amperage rating on the data plate. Contact your local sales representative for more information.



Optional, inkless, seven day, graphic, chart recorder

Control Panel:

Keyed on/off switch with set point security

Microprocessor control system with audio and visual alarms

Bright, digital temperature display

Doors:

Spring-loaded, self closing doors with 90° stay-open feature

Lockable doors for added sample security

Cabinets shown: 23.3 cu. ft. single door (REL2304) lab refrigerator with glass door and 51.1 cu. ft. double door (REL5004) lab refrigerator with solid doors

Thermo Scientific Revco Laboratory Refrigerators With Solid Doors

Temperature Range: +1°C to +8°C, factory preset to +4°C (auto defrost) Optional +5°C setpoint available (order option 7508TA)

Model No.	Cu. Ft. (L)	Voltage (Hz)	Certification	Plug	Cabinet	Door	Adjustable Shelves	Int. Dimensions* H x D x W inches (mm)	Ext. Dimensions* H x D x W inches (mm)	Ship Weight lb (kg)
REL404A	4.9	115 (60)	UL	NEMA 5-15	undercounter	single	3	20.0 x 20.5 x 20.0	33.4 x 26.0 x 24.0	220
REL404D	(133)	208/230 (60)	UL	NEMA 6-15				(508 x 521 x 508)	(850 x 660 x 610)	(100)
REL404V		230 (50)	CE	European						
REL404W†		230 (50)	CE	U.K.						
Exterior height before caster installation.										
REL1204A	11.5	115 (60)	UL	NEMA 5-15	space	single	4	52.4 x 21.75 x 20.0	73.6 x 29.4 x 24.0	280
REL1204D	(326)	208/230 (60)	UL	NEMA 6-15	saver			(1331 x 553 x 508)	(1869 x 748 x 610)	(127)
REL1204V		230 (50)	CE	European						
REL1204W†		230 (50)	CE	U.K.						
REL2304A	23.3	115 (60)	UL	NEMA 5-15	upright	single	4	58.0 x 29.0 x 24.0	79.2 x 37.2 x 28.0	370
REL2304D	(659)	208/230 (60)	UL	NEMA 6-15				(1473 x 737 x 610)	(2012 x 945 x 711)	(168)
REL2304V		230 (50)	CE	European						
REL2304W†		230 (50)	CE	U.K.						
REL3004A	29.2	115 (60)	UL	NEMA 5-15	upright	single	4	58.0 x 29.0 x 30.0	79.2 x 37.2 x 34.0	435
REL3004D	(826)	208/230 (60)	UL	NEMA 6-15				(1473 x 737 x 762)	(2012 x 945 x 864)	(197)
REL3004V		230 (50)	CE	European						
REL3004W†		230 (50)	CE	U.K.						
REL5004A	51.1	115 (60)	UL	NEMA 5-15	upright	double	8	58.0 x 29.0 x 52.5	79.2 x 37.2 x 56.5	585
REL5004D	(1447)	208/230 (60)	UL	NEMA 6-15				(1473 x 737 x 1334)	(2012 x 945 x 1435)	(265)
REL5004V		230 (50)	CE	European						
REL5004W†		230 (50)	CE	U.K.						
REL7504A	78.8	115 (60)	UL	NEMA 5-15	upright	triple	12	58.0 x 29.0 x 81.0	79.2 x 37.2 x 85.0	805
REL7504D	(2231)	208/230 (60)	UL	NEMA 6-15				(1473 x 737 x 2057)	(2012 x 945 x 2159)	(365)
REL7504V		230 (50)	CE	European						
REL7504W		230 (50)	CE	U.K.						

* Published interior volumes are nominal; useable cu. ft. (L) capacities may be offset by shelves, drawers, blower coils, or cabinet protrusions. For specific cabinet dimensions and allowances, or for verification of clearance tolerances, contact our sales representative. Product performance may be affected by ambient temperature conditions, humidity conditions, sample loading preferences, and frequency of door openings. Contact our sales representative for specific inquiries regarding your application. 4.7 cu. ft. exterior dimensions are without casters.

† Due to differences in building wiring regulations in Australia and New Zealand, the current draw for the W-voltage units rated less than 10A may utilize a 10A circuit breaker. This rating only applies to Australia and New Zealand. Confirm the amperage rating on the data plate. Contact your local sales representative for more information.



Wolf Laboratories Limited

www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk



Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

