

AF 103 *XSafe*

Self Contained Ice Machine 120 kg

Item #:

Project:

Quantity:



FEATURES

- Produces granular shape ice flakes, 75% hardness.
- Electronically controlled operation, with self-diagnostic functions with external alarm lights providing operational information for early alert and fast diagnosis of operating issues.
- External Components constructed from corrosion-resistant stainless steel crafted for optimal aesthetic appeal through superior fit and finish.
- Ergonomically convenient, slanted & disappearing storage bin door.
- Front access for easier maintenance.
- Front-in, front-out airflow allows for built-in installations.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



AF 103
Flake ice
Residual water content 25%

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

30 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.





Self Contained Ice Machine 120 kg

AF 103 XSafe

Self Contained Ice Machine 120 kg


Item #:
Project:
Quantity:

Self Contained Ice Machine 120 kg

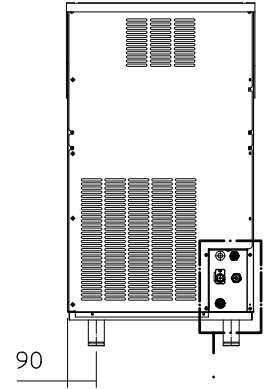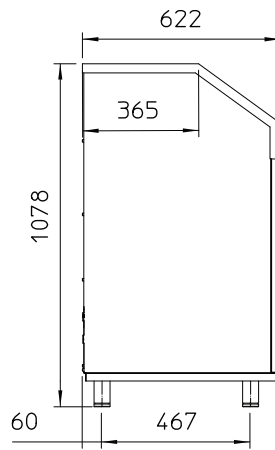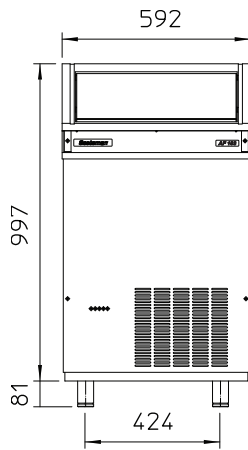

UNIT OF MEASUREMENT: mm

1. 13/16" OD - OVERFLOW DRAIN
2. 3/4" GAS - WATER INLET
3. 3/4" GAS - WATER OUTLET WATER COOLED UNIT ONLY
4. 3/4" GAS - WATER INLET WATER COOLED UNIT ONLY
5. CORD SET

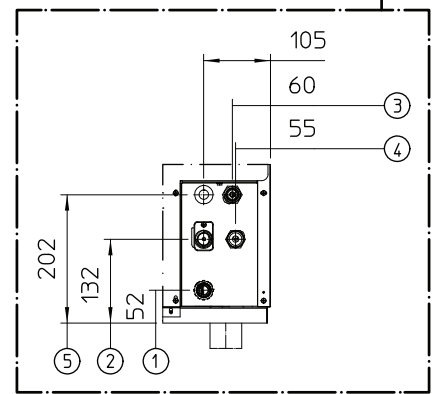

UNIT DATA		SHIPPING DATA										
Size (W x D x H)		592 x 622 x 1078 mm		Carton (W x D x H)		670 x 690 x 1180 mm						
Net weight		66 kg		Weight		74 kg						
Version	Voltage	24 h ice production kg			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
		°C Amb. / °C Water			kWh/100 kg	kWh/24h	l/h	W	W	No. x Ømm ²	A	
		10°C/10°C	21°C/10°C	32°C/21°C								
AF 103 AS	230/50/1	120	120	93	12.1	11.5	4.2	550	1200	3 x 1.5	10	
AF 103 WS	230/50/1	110	108	90	11.8	10.5	32.0	440	1200	3 x 1.5	10	
AF 103 AS	230/60/1	131	123	97	12.0	12.0	4.0	540	1400	3 x 1.5	10	

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions



Wolflabs

Wolf Laboratories Limited

www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk



Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

