


AF 80 *XSafe*

Self Contained Ice Machine 70 kg

Item #:
Project:
Quantity:

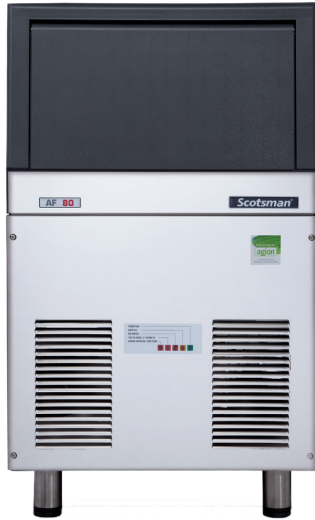

FEATURES

- Produces granular shape ice flakes, 75% hardness
- Electronically controlled operation, with self-diagnostic functions with external alarm lights providing operational information for early alert and fast diagnosis of operating issues
- External Components constructed from corrosion-resistant stainless steel crafted for optimal aesthetic appeal through superior fit and finish
- Ergonomically convenient, slanted & disappearing storage bin door
- Front access for easier maintenance
- Front-in, front-out airflow allows for built-in installations
- Also available as AF80 LAB: specifically designed to be used with demineralized and distilled water. Already fitted with Shuko plug.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



AF 80
Flake ice
Residual water content 25%

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

25 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.


Self Contained Ice Machine 70 kg

AF 80 XSafe

Self Contained Ice Machine 70 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 70 kg

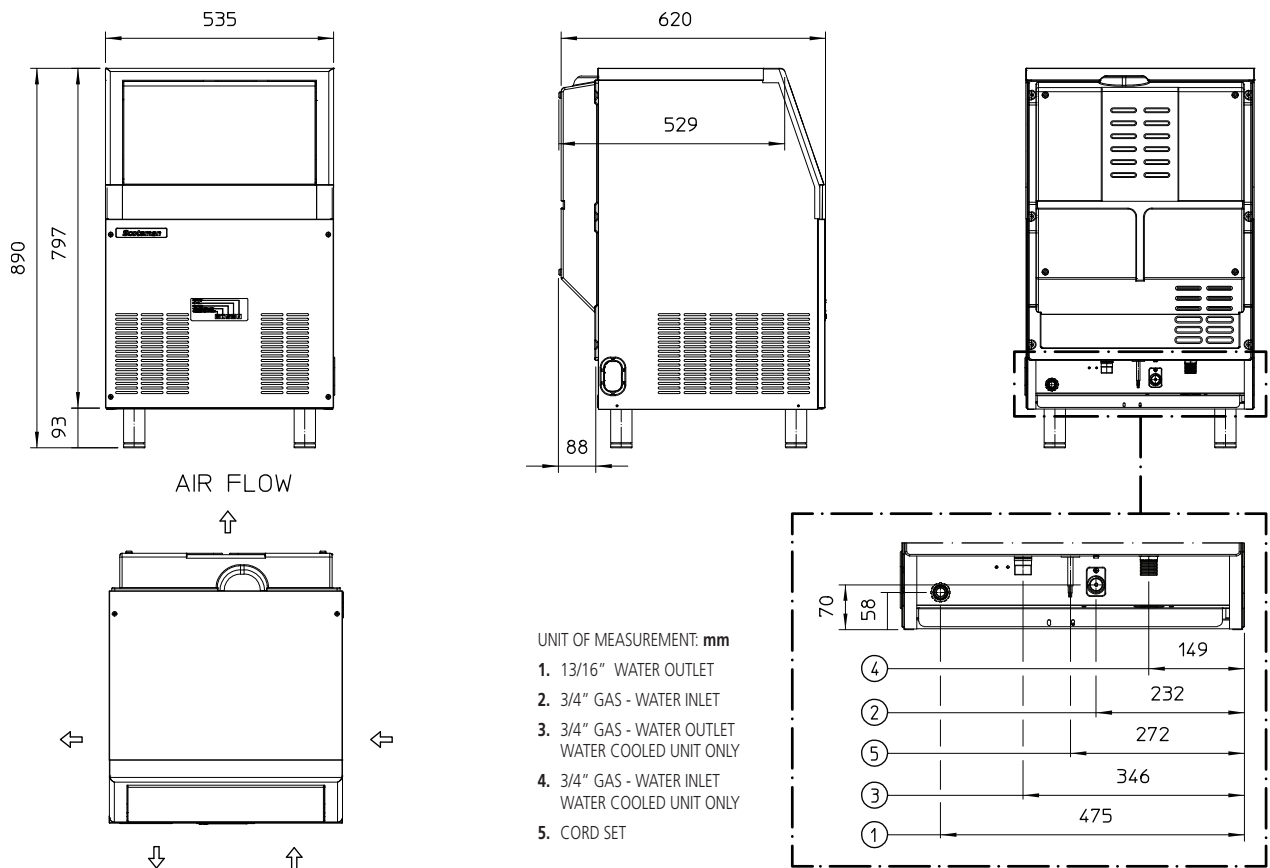

UNIT DATA		SHIPPING DATA									
Size (W x D x H)	535 x 620 x 890 mm	Carton (W x D x H)	600 x 690 x 980 mm								
Net weight	50 kg	Weight	58 kg								
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
AF 80 AS	230/50/1	70	67	53	13.0	6.9	2.2	340	790	3 x 1.5	10
AF 80 WS	230/50/1	73	66	56	12.5	7.0	17.1	300	780	3 x 1.5	10
AF 80 AS	230/60/1	70	67	53	13.0	6.9	2.2	340	900	3 x 1.5	10
AF 80 WS	230/60/1	73	66	56	12.5	7.0	17.1	300	900	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions



Wolflabs

Wolf Laboratories Limited

www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk



Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

