

323Dz/RL general purpose dispensing pump

300 series

Watson-Marlow Pumps

FEATURES

- Flow rates from 0.04ml/min to 3000ml/min
- High-accuracy microprocessor control within $\pm 1.0\%$
- Zero maintenance brushless DC motor
- Menu driven calibration procedure with mid-batch re-calibration possible at any time
- Adjustable speed 'ramps' reduces splashing and frothing
- Non-drip function eliminates drips at dose end
- Selectable dual voltage operation 100-120V/220-240V
- Dispensing by keypress, timed interval or a remote footswitch/handswitch
- 323Dz/RL features the simple tube loading of the 501RL pumphead, which accepts seven tube bore sizes, and provides the highest flow rates




Watson-Marlow...Innovation in Full Flow


PERFORMANCE

Flow rates (ml/min)								
		0.5mm	0.8mm	1.6mm	3.2mm	4.8mm	6.4mm	8.0mm
323Dz/RL	Flow rates (ml/min)	0.04-13	1.12-37	0.43-130	1.9-560	4-1200	6.4-1900	10-3000
1.0 - 300rpm	Minimum recommended dose (ml)	0.2	0.6	2.1	9.3	20.2	31.8	50.0

Dose size - using 323Dz/RL at 300rpm						
	Accuracy	10ml	25ml	50ml	100ml	250ml
Recommended tube bore	High	1.6mm	3.2mm	4.8mm	8.0mm	8.0mm
Approximate dose time - seconds		4.7	2.7	2.5	2.0	5.0
Recommended tube bore	Normal	3.2mm	4.8mm	8.0mm	8.0mm	8.0mm
Approximate dose time - seconds		1.1	1.2	1.0	2.0	5.0

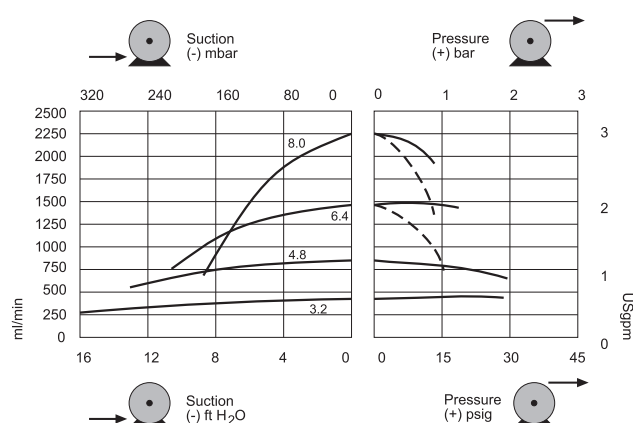

TECHNICAL DRAWINGS

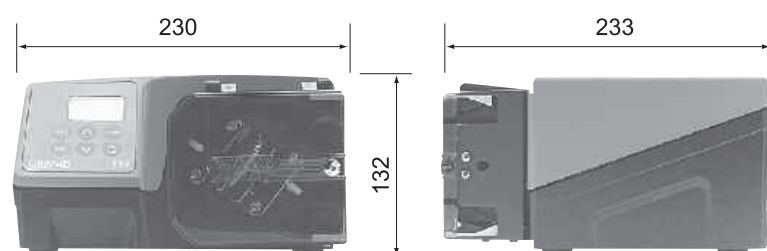

TECHNICAL SPECIFICATION

Weight	5.6kg
Operational temperature range	5C to 40C
Noise	<70dBA at 1m
Control ratio	300:1
Standards	CE, EN60529 (IP31)
Supply	1ph, 100-120V, 220-240V 50/60Hz, 100VA

MATERIALS OF CONSTRUCTION

Component	Material
Drive	
Drive base	Powder coated aluminium coating
Drive top	Self-coloured ABS plastic
Pumphead	
Rotor	Mazak, chromium plated
Tube clamps, hinges	Acetal copolymer kematal
Guide rollers	Delrin
Rollers	MoS2 filled Nylon 6 (Nylatron)
Guard	Polycarbonate
Springs, spindles	Stainless steel

ORDER INFORMATION

Product codes		
Description		Partcode
323Dz/RL	drive + 501RL pumphead for 1.6mm wall tube	030.3183.RL0*

* Replace last 0 with A, E or U for American, European or UK mains supply (American 110V 1ph 60Hz)
If required for use with STA-PURE and Chem-Sure tubing, please contact Watson-Marlow Bredel technical support for drive and pumphead selection

Tube ordering codes				
Bore/wall (mm)	Bioprene	Marprene	Platinum Silicone	PVC
0.5 / 1.6	903.0005.016	902.0005.016	913.A005.016	
0.8 / 1.6	903.0008.016	902.0008.016	913.A008.016	
1.6 / 1.6	903.0016.016	902.0016.016	913.A016.016	950.0016.016
3.2 / 1.6	903.0032.016	902.0032.016	913.A032.016	950.0032.016
4.8 / 1.6	903.0048.016	902.0048.016	913.A048.016	950.0048.016
6.4 / 1.6	903.0064.016	902.0064.016	913.A064.016	950.0064.016
8.0 / 1.6	903.0080.016	902.0080.016	913.A080.016	950.0080.016
Bore/wall (mm)	Neoprene	STA-PURE®	Chem-Sure®	Fluorel®
0.8 / 1.6	920.0008.016			970.0008.016
1.6 / 1.6	920.0016.016	960.0016.016	965.0016.016	970.0016.016
3.2 / 1.6	920.0032.016	960.0032.016	965.0032.016	970.0032.016
4.8 / 1.6	920.0048.016	960.0048.016	965.0048.016	970.0048.016
6.4 / 1.6	920.0064.016	960.0064.016	965.0064.016	970.0064.016
8.0 / 1.6	920.0080.016	960.0080.016	965.0080.016	970.0080.016

All flow rates shown were obtained pumping water at 20C (68F) with zero suction and delivery heads. Watson-Marlow, Bioprene and Marprene are trademarks of Watson-Marlow Limited. Disclaimer: The information contained in this document is believed to be correct but Watson-Marlow Limited accepts no liability for any errors it contains, and reserves the right to alter specifications without notice. LoadSure is a trademark of Watson-Marlow Limited.
© STA-PURE PFL and © STA-PURE PCS are registered trademarks of W.L Gore & Associates Inc.
Please state the product code when ordering pumps and tubing.

**WATSON
MARLOW**
Pumps



Wolf Laboratories Limited

www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk



Use the above details to contact us if this literature doesn't answer all your questions.

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

