

PRODUCT SPECIFICATIONS

Model		DW-30L278SF	DW-30L278FL	
Technical Data	Cabinet Type	Upright	Upright	
	Climate Class	4	4	
	Cooling Type	Direct cooling	Direct cooling	
	Defrost Mode	Manual	Manual	
	Refrigerant	HC	HC	
	Sound Level(dB(A))	40	40	
Performance	Cooling Performance(°C)	-30	-30	
	Temperature Range(°C)	-10~-30	-10~-30	
Control	Controller	Microprocessor	Microprocessor	
	Display	LCD	LCD	
Electrical Data	Power Supply(V/Hz)	220-240/50	220-240/50	
	Power(W)	330	330	
	Electrical Current(A)	2.0	2.0	
Dimensions	Capacity(L/Cu.Ft)	278/9.8	278/9.8	
	Net/Gross Weight (approx)	kg	115/135	115/135
		lbs	254/298	254/298
	Interior Dimension (W*D*H)	mm	515*440*1220	515*440*1220
		in	20.3*17.3*48	20.3*17.3*48
	Exterior Dimension (W*D*H)	mm	742*718*1810	742*718*1810
		in	29.2*28.3*71.3	29.2*28.3*71.3
	Packing Dimension (W*D*H)	mm	805*725*1970	805*725*1970
in		31.7*28.5*77.6	31.7*28.5*77.6	
Container Load(20'/40'/40'H)		23/46/46	23/46/46	
Functions	High/Low Temperature	Y	Y	
	Remote Alarm	N	N	
	Power Failure	Y	Y	
	Sensor Error	Y	Y	
	Low Battery	N	N	
	High Ambient Temperature	N	N	
	Door Ajar	N	N	
Accessories	Caster	Y	Y	
	Foot	Y	Y	
	Porthole	N	N	
	Drawers/Inner Doors	6/-	6/-	
	USB Interface	N	N	
	Temperature Recorder	N	N	
Others	Certification	CE ATEX	CE ATEX	
	Interior Material/Colour	PS Plate/white	Antistatic PS Plate/black	

Haier Biomedical

Intelligent Protection of Life Science

Spark Free Freezer



DW-30L278SF/FL



Interior Designed for Explosion Proof,HC Refrigerant System for Energy Savings,and Smart System Control



Explosion Proof Interior

SF series freezers feature standard interior design, door frame, and drawer. FL series freezers feature antistatic interior design, door frame, and drawer. All metal parts are grounded reliably and interior design is explosion proof. Certificates include China anti-explosion proof and EU explosion proof ATEX II C-T6



HC System to save energy

- Imported hydrocarbon compressor, and hydrocarbon refrigerants complete a true green, environmentally safe refrigeration system
- Cyclo-isopentane polyurethane foam insulation meets EU ROHS directive for a green and safe environment
- Optimized hydrocarbon refrigeration system design ensures a more energy efficient operation



Excellent temperature uniformity

Cold shelf evaporator design allows a faster cool down, and more uniform temperature distribution, typically $\pm 4^{\circ}\text{C}$



Low noise

Unique structural design and system emits only 40 dba in sound level, eliminating unhealthy high pitch noise

Safer by Design



Micro-processor control system

- Micro processor control with LCD temperature display and adjustable range of -10°C to -30°C; 0.1°C increment;
- Multiple alarms including high temperature, low temperature, sensor alarm and power failure alarm;
- Alarms are in buzzer and flashing light. Continuous alarm for more than 24 hours after power failure



Good thermal insulation

The super-thick insulation layer and removable door gasket design are adopted to improve the thermal insulation and energy-saving effects and enhance the reliability of the refrigerator



Drawers

The SF series of freezers are provided with six common plastic drawers and the FL series are provided with six drawers made of anti-static materials. Each drawer has a label sticker slot to meet different storage and identification requirements



Caster

Standard caster and leveling leg design for ease of maneuvering and securing the unit on ground




Safety lock

Dual-lock design of lock catch + built-in lock. A padlock can be added to the lock catch to ensure double safety




Warning labels


Warning label on the unit front for SF series with non-antistatic interior design




TYPICAL PERFORMANCE CHARACTERISTICS IN 25°C AMBIENT

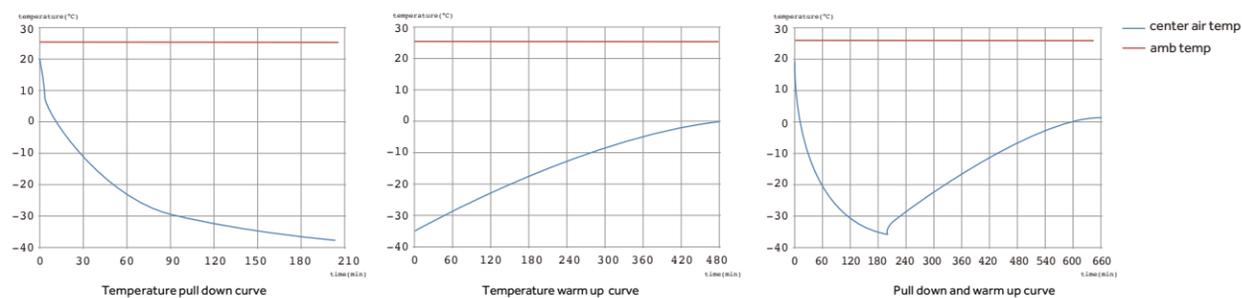

Application range

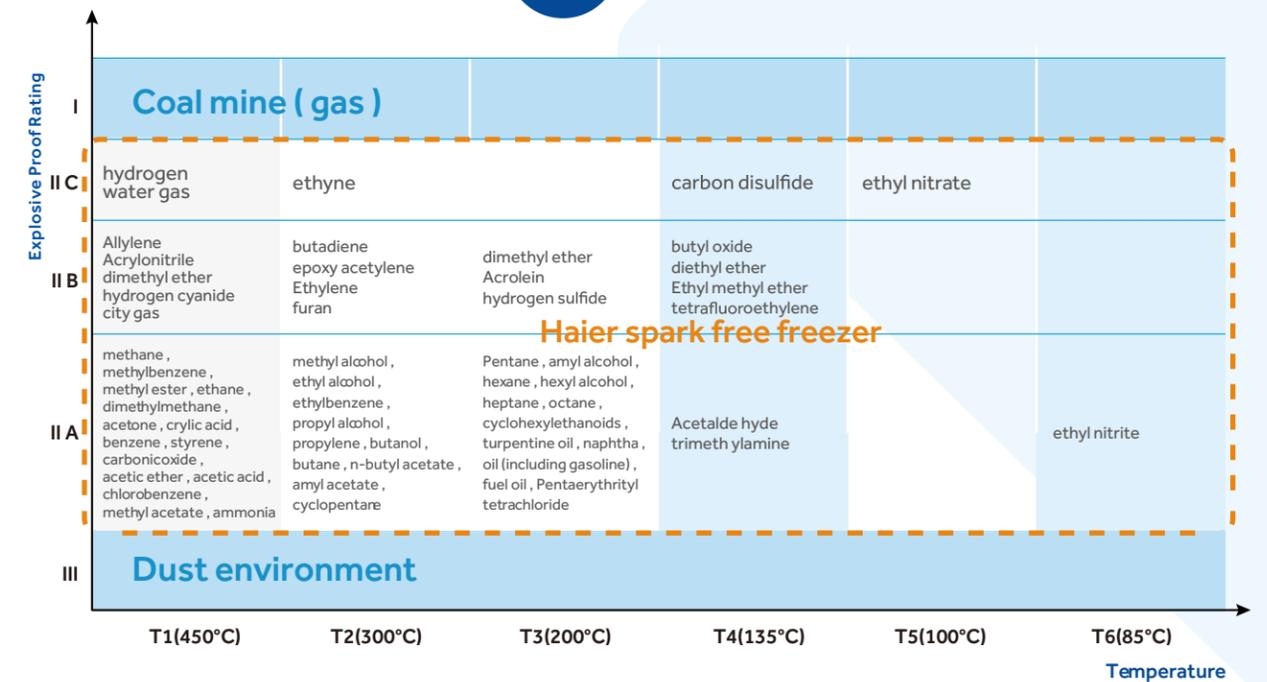

PRODUCT DIMENSION DRAWING

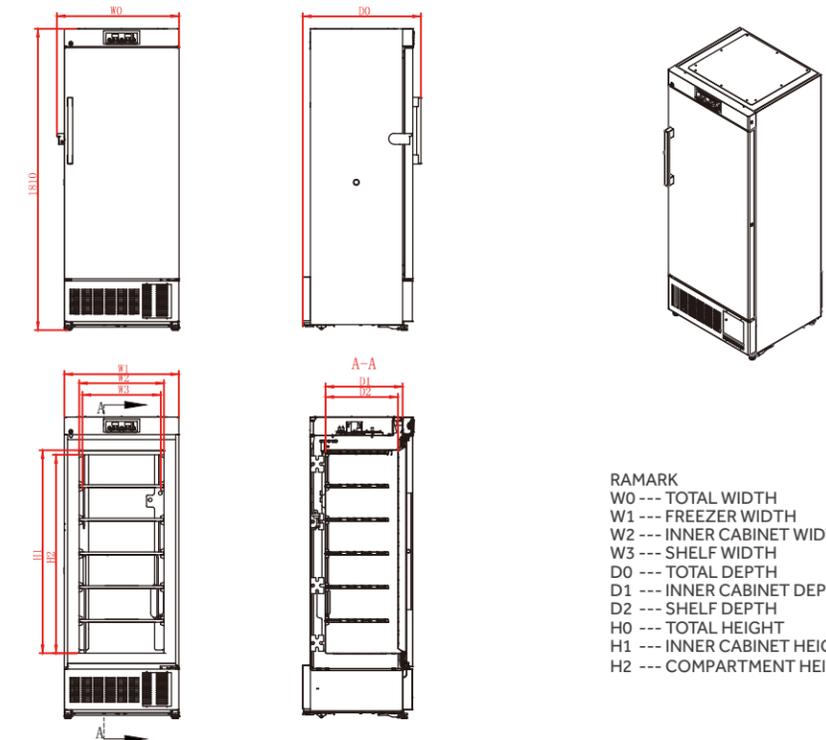

RAMARK
W0 --- TOTAL WIDTH
W1 --- FREEZER WIDTH
W2 --- INNER CABINET WIDTH
W3 --- SHELF WIDTH
D0 --- TOTAL DEPTH
D1 --- INNER CABINET DEPTH
D2 --- SHELF DEPTH
H0 --- TOTAL HEIGHT
H1 --- INNER CABINET HEIGHT
H2 --- COMPARTMENT HEIGHT

MODEL	CODE	W0	W1	W2	W3	H0	H1	H2	D0	D1	D2
DW-30L278SF/FL		742mm	695mm	515mm	475mm	1810mm	1220mm	1192mm	718mm	468mm	440mm



WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.