


# KERN PDT 1000-3

Precision balance with flexible functionality and touch display

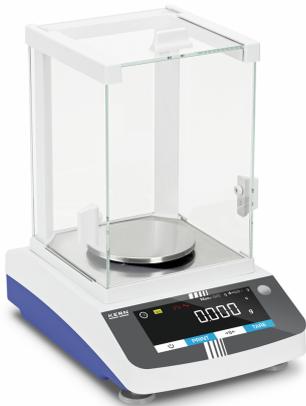

tl (Tw)  
ozt  
ct  
lb  
oz  
ffa

## Category

Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	PDT

## Measuring System

Construction type of the scale	Single-range balance
Weighing system	Force compensation
Weighing capacity [Max]	1000 g
Readability [d]	0,001 g
Reproducibility	0,004 g
Linearity	± 0,005 g
USP Minimum weight of sample (k = 2, U = 0.1%)	8 g
Resolution	1.000.000
Adjustment options	Internal calibration (automatic)
Recommended adjusting weight	1 kg (E2)
Possible calibration points	500 g; 1 kg
Automatic adjustment - Standard temperature deviation	2 °C
Automatic adjustment - Standard time interval	4 h
Stabilization time	4 s
Warm-up time	8 h
Eccentric loading at 1/3 [Max]	0,009 g
Maximum creep (15 minutes)	10 mg
Maximum creep (30 minutes)	20 mg
Default unit	g
Units	g gn dwt

## Display

Display type	LCD
Display type	LCD
Display backlight	✓
Display screen size	140×48 mm
Display segments	7
Display digit height	20 mm
Languages of the user interface	English Symbol language

## Construction

Dimensions completely mounted (W×D×H)	207×318×360 mm
Dimensions rectangular draught shield - inner (W×D×H)	174×162×228 mm
Dimensions rectangular draught shield - outer (W×D×H)	201×220×256 mm
Dimensions weighing surface (Ø)	115 mm
Dimensions weighing surface	115 mm
Material housing	ABS plastic
Material weighing plate	stainless steel
Material draught shield	glass
Material display housing	glass
Level indicator	✓
Levelling feet adjustable	✓

## Functions

Sum memory function	✓
Recipe/summing level	Rez A (Net total)
Percentage determination	✓
Density determination	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Underfloor weighing	Hook (included in delivery)
Function for averaging under unstable weighing conditions	✓
Standby function	✓
Counting function	✓
Counting resolution (laboratory conditions)	100.000

# KERN PDT 1000-3

# KERN

Precision balance with flexible functionality and touch display

Smallest piece weight when piece counting - laboratory conditions	10 mg
Smallest piece weight when piece counting - normal conditions	100 mg
Reference quantity	1 ... 100
Peak function	✓
Statistic function	✓
Auto-off interval(s) in mains power mode	off
Tare function	manual (multi)
Number of keys for operation	4

## Interface

Interfaces	RS-232 standard USB-Device
------------	-------------------------------

## Power Supply

Supplied power supply	Power supply unit
Plug-in power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO AUS UK US CH
Input voltage power supply / power [Max]	100 V - 240 V AC, 50 / 60 Hz
Input voltage device / power [Max]	12 V; 2 A

## Environmental conditions

Ambient temperature [Min]	15 °C
Ambient temperature [Max]	25 °C
Humidity of environment [Min]	15 %
Humidity of environment [Max]	80 %
Storage temperature [Min]	-10 °C
Storage temperature [Max]	60 °C

## Approval

CE mark	✓
---------	---

## Services (optional)

Article number for DAkkS calibration	963-103
Article number for certificate of conformity	969-517

## Packing & Shipping

Delivery time	1 d
Dimensions packaging (W×D×H)	325×443×396 mm

Shipping method	Parcel service
Net weight approx.	6 kg
Gross weight approx.	8 kg
Shipping weight	11,4 kg

## Pictograms

### STANDARD



### OPTION





# WolfLabs

**Pricing on any accessories shown can be found by keying the part number into the search box on our website.**

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

**[www.wolflabs.co.uk](http://www.wolflabs.co.uk)**

**Tel : 01759 301142**

**Fax : 01759 301143**

**[sales@wolflabs.co.uk](mailto:sales@wolflabs.co.uk)**

Please contact us if this literature doesn't answer all your questions.