

## ID-Nr. 30443-001 Model UB90.060.110.2T



| Dimensions  |                                       |
|---|---------------------------------------|
| Width (external)                                  | 1102.00 mm                            |
| Depth (external)                                  | 574.00 mm                             |
| Height (external)                                 | 600.00 mm                             |
| Width (internal)                                  | 979.00 mm                             |
| Depth (internal)                                  | 452.00 mm                             |
| Height (internal)                                 | 502.00 mm                             |
| The available internal dimensions can vary depend | ing on the interior equipment package |

Door / Drawer colour

Door / Drawer surface finish

Minimum exhaust air quantity 10 times

| Weight / Load                     |              |
|-----------------------------------|--------------|
| Weight without interior equipment | 180 kg       |
| Distributed load                  | 277.00 kg/m² |
| Maximum load                      | 300 kg       |
|                                   |              |
| Ventilation                       |              |
| Extraction air                    | 50 DN        |

| Differential pressure (10 times air change) | 1 Pa       |
|---|------------|
| Colouring / Surface finish                  |            |
| Body colour code                            | RAL 7035   |
| Body colour                                 | light grey |
| Body surface finish                         | plain      |
| Door / Drawer colour code                   | RAL 7035   |

2 m³/h

light grey

plain

| General Information   |          |
|-----------------------|----------|
| Number of doors       | 2        |
| Door opening angle    | 135.00°  |
| Depth with open doors | 1097 mm  |
| Customs tariff number | 94032080 |


















safety storage under bench cabinet UB-T-90 Model UB90.060.110.2T, light grey (RAL 7035)


Safe and approved storage of flammable hazardous substances in working areas

## **Function / construction:**


- Robust construction and longevity: body made of powdercoated sheet steel
- Easy handling with comfort: doors stop in any position, self-closing in the event of fire
- User-friendly: access to all containers, 93° opening of the wing door, interior of the cabinet completely visible
- No unauthorised use: doors lockable with cylinder lock and locking state indicator (red/green)
- Mobile: castors with plinth (optionally available), easy moving of the cabinet
- Ventilation: integrated air ducts ready for connection (DN 50) to a technical exhaust system


Front view Side view



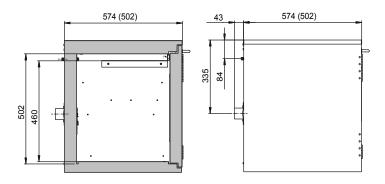

Top view







Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

## www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.