


OFI 20I motor AC (oil-less)

Voltage	V	100	100	120	200	200	208	230	230			
Frequency	Hz	50	60	60	50	60	60	50	60			
Motor	HP	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22			
	kW	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90			
Displacement	l/min	146	170	170	146	170	170	146	170			
	CFM	5.16	6.00	6.00	5.16	6.00	6.00	5.16	6.00			
FAD @ 8 bar	l/min	65	75	75	65	75	75	65	75			
	CFM	2.30	2.65	2.65	2.30	2.65	2.65	2.30	2.65			
Max. pressure ¹⁾	bar	8	8	8	8	8	8	8	8			
	psi	120	120	120	120	120	120	120	120			
Max. current	A	-	-	11.0	-	-	-	6.2	5.8			
Tank size	litres	-	-	-	-	-	-	-	-			
	gallon	-	-	-	-	-	-	-	-			
Weight	kg	23	23	23	23	23	23	23	23			
	lbs	51	51	51	51	51	51	51	51			
Noise level	dB(A)/1m	77	80	80	77	80	80	77	80			
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes			
Duty cycle		100%	100%	100%	100%	100%	100%	100%	100%			

cu.ft./min. Ltr./min.

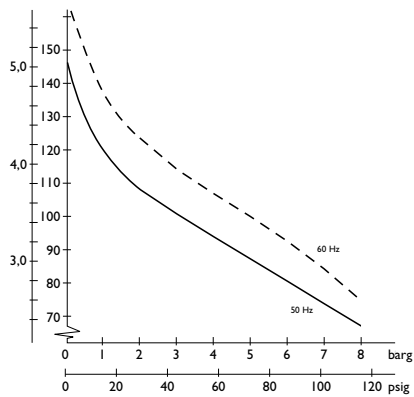

Dimensions (l x w x h)

351 x 180 x 326 mm / 13 7/8 x 7 1/8 x 12 7/8 inch

¹⁾ Higher pressure available upon request

Technical modifications reserved

JUN-AIR 





WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.