

EXPLORER PLUS

Semi-Micro Balances



Engineered for Accuracy, Designed for Demanding Applications

The new Explorer Plus (EXP Series) offers a premium weighing performance, compliance support and data traceability. The advanced features take the EXP to the next level by optimizing the user experience. This flagship balance is crafted to meet the most demanding requirements of modern scientific research.

Unique Features:

Intelligent User Experience

Seamless setup with motorized leveling, anti-pinch auto-doors, touchless sensors, ionizer and draftshield light. A 7-inch glass touchscreen, chemical protection and 2 customizable status lights.

Supports Compliance for Data Traceability

Ensure compliance with 4-level user system, password protection, and 100k internal system log. The time synchronization NTP function confirms data traceability to meet pharmaceutical regulations.

Effortless System Integration

Advanced communication capabilities with straightforward integration to Laboratory Information Management Systems (LIMS), and hassle-free data transfer with driverless HID for easy data input.

EXPLORER PLUS[™] Semi-Micro Balances


Specifications




| Model | EXP125D/AD | EXP125/AD | EXP225D/AD | EXP225/AD |
|---|---|------------|---------------|------------|
| | EXP125DM/AD | EXP125M/AD | EXP225DM/AD | EXP225M/AD |
| Capacity | 82 g / 120 g | 120 g | 120 g / 220 g | 220 g |
| Readability d, Fine Range | 0.01 mg | 0.01 mg | 0.01 mg | 0.01 mg |
| Readability d, Full Range | 0.1 mg | 0.01 mg | 0.1 mg | 0.01 mg |
| Repeatability (sd.), ≤5% of Full Load Typical | 0.01 mg | 0.01 mg | 0.01 mg | 0.01 mg |
| Repeatability (sd.), 5% of Full Load to Fine Range Max | 0.02 mg | 0.02 mg | 0.02 mg | 0.02 mg |
| Repeatability (sd.), Fine Range Max to Full Range | 0.1 mg | 0.02 mg | 0.1 mg | 0.02 mg |
| Linearity Deviation Typical | 0.06 mg | 0.06 mg | 0.06 mg | 0.06 mg |
| Linearity Deviation | 0.2 mg | 0.1 mg | 0.2 mg | 0.1 mg |
| Verification Interval, e (EXPM models only) | 1 mg | 1 mg | 1 mg | 1 mg |
| Approval Class (EXPM models only) | Class I | Class I | Class I | Class I |
| Span Calibration Points | 25g, 50g, | 75g, 100g | 50g, 100g, | 150g, 200g |
| Weighing Units | g, mg, ct, N, oz, ozt, Grain, dwt, mo, msg, tcl, tola, baht, Custom 1, Custom 2 | | | |
| Weighing Units (EXPM model only) | g, mg, ct | | | |
| Applications | Basic Weighing, Parts Counting, Check Counting, Percent Weighing, Check Weighing, Dynamic Weighing, Totalization, Formulation, Differential, Density Determination, Peak Hold, Pipette Adjustment, SQC, Fill Weight Variation, Flow Rate Control | | | |
| Stabilization Time (typical) | 0.1 mg: ≤2 seconds, 0.01 mg: ≤ 5 seconds | | | |
| Sensitivity Temperature Drift (ppm/°C) | 0.8 | | | |
| Min-Weight (Typical) (K=2, U=1%) | 2 mg | | | |
| Min-Weight (typical) (USP, K=2, U=0.10%) | 20 mg | | | |
| Min-Weight (optimal) (USP, K=2, U=0.10%, SRP≤0.41d) | 8.2 mg | | | |
| Terminal Display | 7-inch TFT 16.7M Color Touch Screen with Glass Overlay, Detachable Terminal | | | |
| Display Resolution | 800 x 480 Pixels | | | |
| Communication | USB Host (Type A) x 2, USB Device (Type B) x 1, USB Device (Type C) x 1 Ethernet (RJ45) x 1, RS232 x 1; Optional Wi-Fi, Bluetooth Dongle | | | |
| Leveling System | Motorized Leveling System with Digital Leveling Bubble | | | |
| Power Supply | AC Adapter Input: 100-240 VAC 0.5A 50-60 Hz AC Adapter Output: 12 VDC 1.5A | | | |
| Weighing Pan Size | Aero Pan 80mm x 80mm | | | |
| Built-in Ionizer | Standard | | | |
| Environmental Sensor (Load Cell) | Temperature Sensor, Relative Humidity Sensor (RH), Air Pressure Sensor | | | |
| Touchless Sensor | 2 Touchless Sensors on the terminal | | | |
| Draftshield with anti-static coating | Standard | | | |
| Automatic Draftshield Door Function | Standard, Open Range: 1/2 open and fully open | | | |
| Draftshield & Terminal Status Lights | Standard, 7-color Selectable | | | |
| Sample Spotlight | | Sta | ndard, White | |
| Terminal Housing Dimensions (W x D x H) | 205mm x 126mm x 66mm | | | |
| Base Housing Dimensions (W x D x H) | 229mm x 275mm x 78mm | | | |
| Assembled Dimensions (W x D x H) | 229mm x 408mm x 372mm | | | |
| Shipping Dimensions (W x D x H) | 415mm x 630mm x 561mm | | | |
| Net Weight | 7.8 kg | | | |
| Shipping Weight | | | 12.0 kg | |

EXPLORER PLUS[™] Semi-Micro Balances

Outline Dimensions

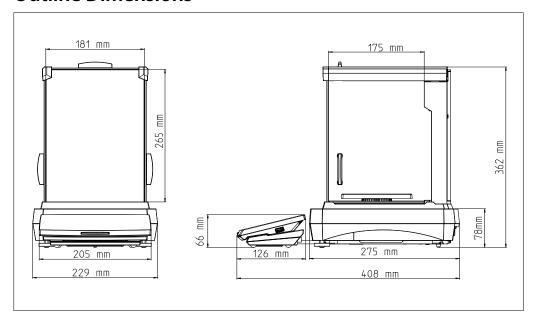

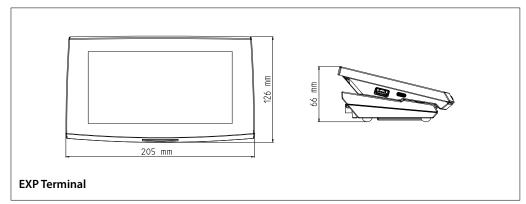

Approvals

- Metrology: OIML R76, EN 45501
- Product Safety: IEC/EN 61010-1; CAN/CSA C22.2 61010-1; UL 61010-1
- Electromagnetic Compatibility: IEC/EN 61326-1 Class B, Basic Environments; FCC Part 15 Class A; Canada ICES-003 Class A

EXPLORER PLUS[™] Semi-Micro Balances

Accessories

| Accessories | | | | | |
|-------------|----------------|--------------------------------------|--|--|--|
| 8 | Item No. | 30944359 | | | |
| | Accessory Name | Bluetooth Printer, Impact, SF40A/BT | | | |
| | | | | | |
| | Item No. | 30064202 | | | |
| | Accessory Name | Printer, Impact, SF40A | | | |
| | | | | | |
| 1 | Item No. | 31059238 | | | |
| | Accessory Name | Fingerprint scanner FIN-100A | | | |
| | | | | | |
| · · · · · · | Item No. | 31059239 | | | |
| | Accessory Name | BT dongle and Wi-Fi dongle LM842 | | | |
| | | | | | |
| Hèce: | Item No. | 30095929 | | | |
| | Accessory Name | Static Ionizer, ION-100A | | | |
| | | | | | |
| | Item No. | 31059237 | | | |
| | Accessory Name | Weighing Kit | | | |
| | | | | | |
| | Item No. | 80253384 | | | |
| | Accessory Name | Density Kit, Solids | | | |
| | | | | | |
| | Item No. | 83034024 | | | |
| n | Accessory Name | Sinker, Glass, Liquid, Density Kit | | | |
| | | | | | |
| | Item No. | 30252145 | | | |
| ANILE . | Accessory Name | Pipette Evaporation Trap | | | |
| | | | | | |
| | Item No. | 30078078 | | | |
| | Accessory Name | Terminal Extension Cable, RS422, 9 m | | | |
| | | | | | |
| J. H | Item No. | 12120799 | | | |
| | Accessory Name | SF40A Paper roll (57,5mm 2pcs) | | | |
| | | | | | |
| | Item No. | 12120798 | | | |
| | Accessory Name | SF40A Ink Ribbon Cassette | | | |

80777116_B 20250826 © Copyright OHAUS Corporation



Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.