

# Self Contained Ice Machine 44 kg



| Item #:   |
|-----------|
| Project:  |
| Quantity: |



#### **FEATURES**

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation
- Front access condenser air filter, removable and washable (air cooled model only).
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- PWD Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC M 87 **Medium Gourmet** 20 g Ø 30 x H 34 mm



EC S 87 Small Gourmet 8 g Ø 21 x H 25 mm

# CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

INTERNAL BIN CAPACITY

19 kg

VOLTAGE V/Hz/ph

230/50/1

#### **CERTIFICATIONS**







#### **OPERATING REQUIREMENTS**


|                    | Minimum        | Maximum        |  |  |  |
|--------------------|----------------|----------------|--|--|--|
| Air temperature    | 10             | 43             |  |  |  |
| Water temperature  | 5              | 38             |  |  |  |
| Water pressure     | 1 bar (14 psi) | 5 bar (70 psi) |  |  |  |
| Electrical voltage | -10%           | +10%           |  |  |  |



# Scotsman<sup>®</sup> Ice Systems

# Self Contained Ice Machine 44 kg

Item #:
Project:
Quantity:

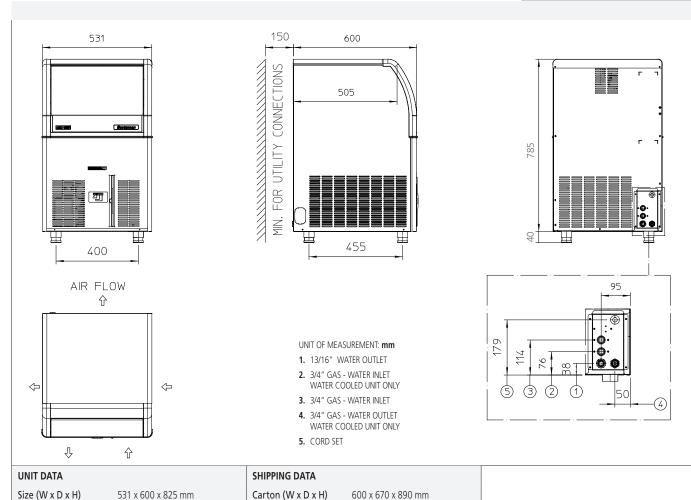

| Net weight 46 kg |          |           |           | Weight 53 kg                        |        |                           |     |                  |            |               |                |
|------------------|----------|-----------|-----------|-------------------------------------|--------|---------------------------|-----|------------------|------------|---------------|----------------|
|                  |          |           |           | ce production kg<br>Amb. / °C Water |        | Energy<br>consumption (*) |     | Instant<br>power | Compressor | Circuit wires | Max. fuse size |
| Version          | Voltage  | 10°C/10°C | 21°C/10°C | 32°C/21°C                           | kWh/   | kWh/<br>24h               |     |                  |            |               |                |
|                  |          | kg        | kg        | kg                                  | 100 kg |                           | I/h | W                | W          | No. x Ømm²    | A              |
| ECM 87 AS        | 230/50/1 | 44        | 44        | 35                                  | 30.7   | 10.8                      | 3.4 | 570              | 1215       | 3 x 1.5       | 10             |
| FCS 87 AS        | 230/50/1 | 40        | 39        | 31                                  | 35.8   | 11 1                      | 5.0 | 580              | 1215       | 3 x 1 5       | 10             |

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions



Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

### www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.