

AF 157 *XSafe EcoX*

Self Contained Ice Machine 190 kg

Scotsman[®]
Ice Systems

Item
Project
Quantity



FEATURES

- Produces granular shape ice flakes, 75% hardness. Ice scoop holder safely positioned in ice-storage bin.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front panel mount ON-OFF Switch.
- Easy, front panel access to technical / service area of the machine.
- Ergonomically designed ice storage access, with disappearing door. Door closing movement dampening system.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.

CONDENSING SYSTEM
air cooled

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
230\50\1



CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Self Contained Ice Machine 190 kg

August 2025


AF 157 *XSafe EcoX*

Self Contained Ice Machine 190 kg

Scotsman[®]
Ice Systems

Item
Project
Quantity

Self Contained Ice Machine 190 kg

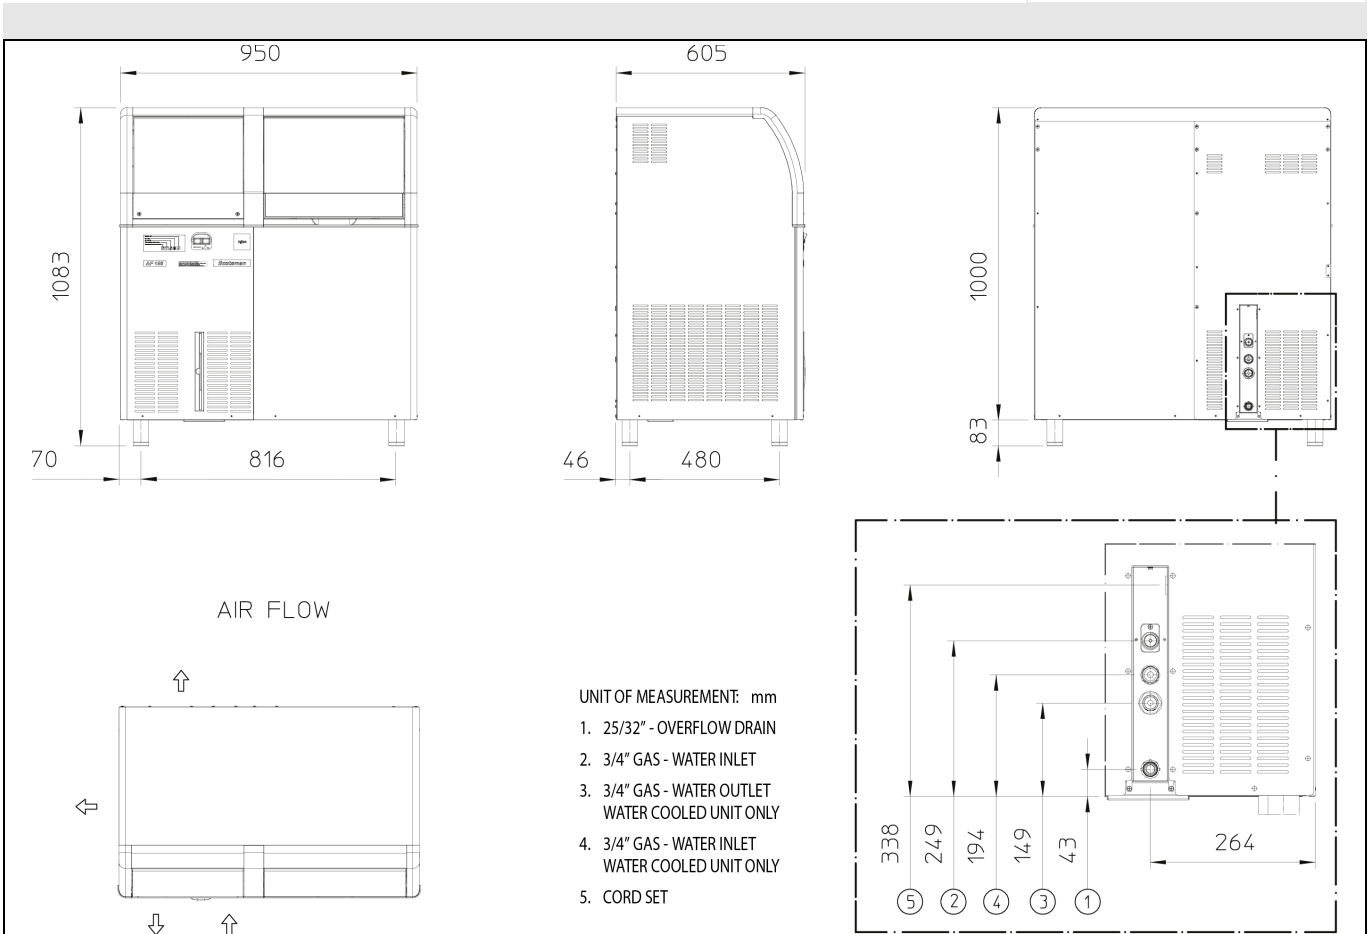

- UNIT OF MEASUREMENT: mm
1. 25/32" - OVERFLOW DRAIN
 2. 3/4" GAS - WATER INLET
 3. 3/4" GAS - WATER OUTLET
WATER COOLED UNIT ONLY
 4. 3/4" GAS - WATER INLET
WATER COOLED UNIT ONLY
 5. CORD SET

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			Size (W x D x H)										
Net weight			Gross weight										
950 x 605 x 1.000 mm			1030 x 680 x 117 mm										
76 kg			89kg										
			24 h ice production kg			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
			C Amb. / °C Water										
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/24h	l/h	W	No. x Ømm ²	A	
			kg	kg	kg								
AF 157 AS OX	230\50\1	A	190	169	137	60	1,1	13	6	550	3 x 1,5	10	



WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.