




EF 124 XSafe

Self Contained Ice Machine 122 kg

Item #:

Project:

Quantity:

		FEATURES <ul style="list-style-type: none">• Produces granular shape ice flakes, 80% hardness.• Ice scoop holder safely positioned in ice-storage bin.• Advanced diagnostics computerized control.• Front panel in and out airflow (air-cooled model only) for built-in installation.• Front access condenser air filter, removable and washable (air cooled version only). Easily accessible, front panel mount, ON-OFF Switch.• Easy, front panel access to technical / service area of the machine.• Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.• PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.• XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.	
 <div>EF 124 Flake ice Residual water content 25%</div>	CONDENSING SYSTEM Air cooled Water cooled	INTERNAL BIN CAPACITY 40 kg	
	REFRIGERANT GAS R134a		
	VOLTAGE V/Hz/ph 230/50/1		
CERTIFICATIONS 		OPERATING REQUIREMENTS	
		Minimum	Maximum
Air temperature		10	43
Water temperature		5	38
Water pressure		1 bar (14 psi)	5 bar (70 psi)
Electrical voltage		-10%	+10%
IMPORTANT NOTICE: Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.			

Self Contained Ice Machine 122 kg

9 November 2020


EF 124 XSafe

Self Contained Ice Machine 122 kg

Item #:

Project:

Quantity:

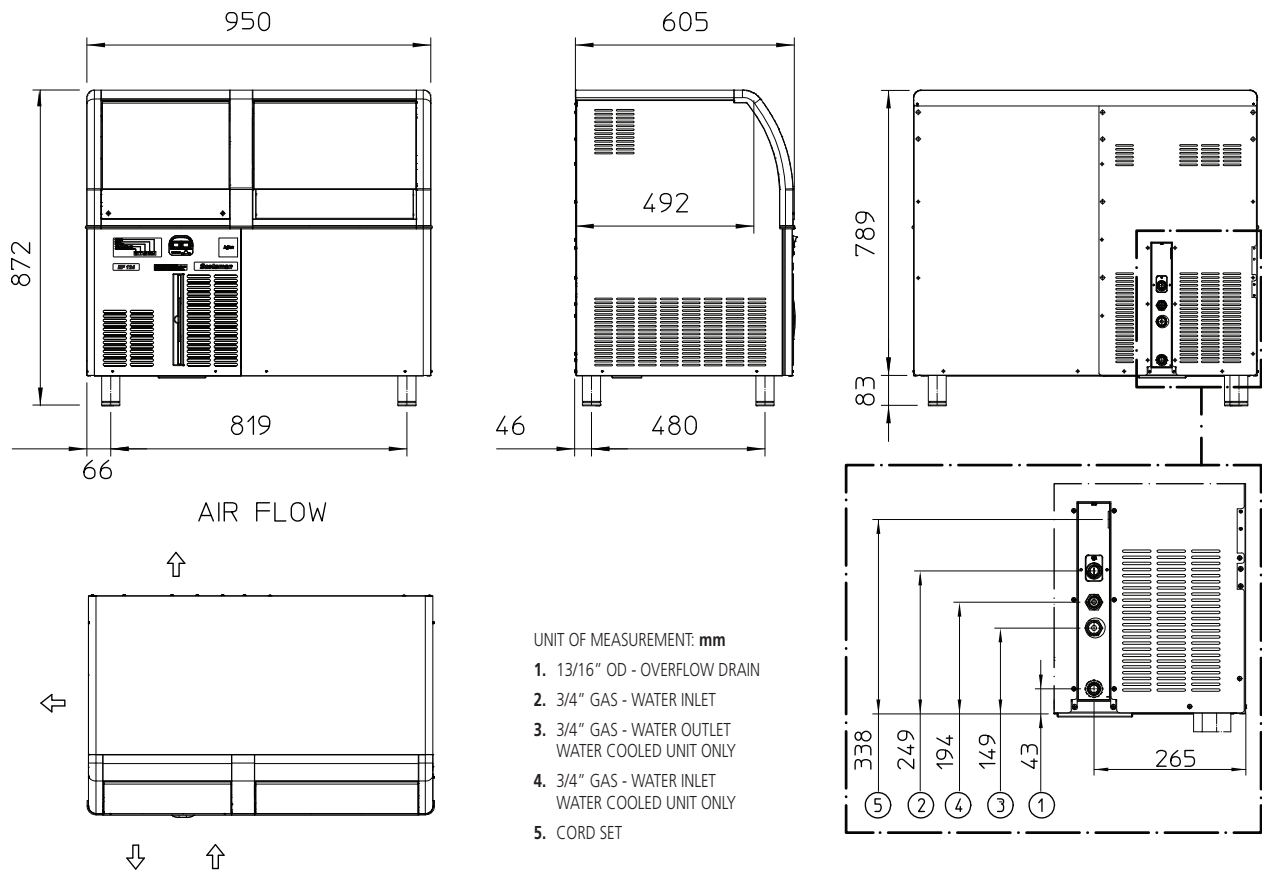

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		950 x 605 x 872 mm			Carton (W x D x H)		1030 x 680 x 960 mm				
Net weight		68 kg			Weight		79 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
EF 124 AS	230/50/1	122	113	91	12.5	11.4	3.9	510	1200	3 x 1.5	10
EF 124 WS	230/50/1	118	110	92	12.0	11.0	27.0	450	1200	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions



WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.