
ORBI-SHAKER™CO2

**Remote Controlled, All Environment Shakers** 

The new Orbi-Shaker CO<sub>2</sub> series is designed for shaking, mixing & aeration applications in extreme environments, including CO<sub>2</sub> incubators. It can withstand temperatures from 0 to 65°C and humidity levels up to 100%.

To avoid contamination, unintentional release of gas or deviations from protocol, all settings are adjusted via the included remote control module. This module can be stored outside of the chamber and connects to the shaker via a flat (1mm thickness) cable, that easily passes through a port or underneath an incubator door without compromising the seal. This allows for user adjustment of run time or mixing speed without opening the chamber door(s).

The instrument is supplied with a non-slip rubber mat platform. In addition, convenient MAGic Clamp™ platforms (of multiple sizes) are also available for use with Erlenmeyer flasks and test tube racks. The unique magnetic attachment method has been widely recognized as the easiest way to instantly change between flask clamps of different sizes.

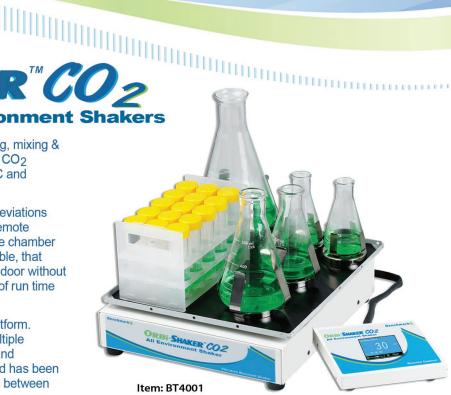

Compatibility Chart:	SureTherm™ CO <sub>2</sub> 45L 180L		New Brunswick™ Galaxy® S41i   Galaxy® 170		Shel Lab® 142L & 167L	Thermo® HeraCell™ 150 240		Fisher® IsoTemp™ 184	VWR® Symphony™ 5.3A 8.5A	
Orbi-Shaker CO <sub>2</sub> (14 x 12" platform)	*	0		•	•	•	•	•	•	
Orbi-Shaker CO <sub>2</sub> XL (16 x 16.5" platform)	N/A	0	N/A	0	•	0	•	0		0
Orbi-Shaker CO <sub>2</sub> XL (18 x 18 platform)	N/A	N/A	N/A	N/A	0	N/A	0	0	N/A	0

\* Compatible 9.5 x 11.5" (Item: H1000-MR) available









Touch Screen, remote controller adjusts shaker settings from outside of the chamber and magnetically attaches to most incubators

### **Ordering Information**

BT4001\* Orbi-Shaker CO2, Shaker with remote control, includes 13x12" non-slip platform, 115V

BT4011\* Orbi-Shaker CO2 XL, Shaker with remote control, includes 16x16.5" non-slip platform, 115V

\*To order item in 230V, add (-E) to item numbe

### <u>Technical Data</u>

Speed Range: 30 to 300 rpm
Speed Increment: 1 rpm
Orbit: 19mm
Max. Capacity:

 BT4001
 2 x 2L or 5 x 1L Flasks

 BT4011
 5 x 2L or 9 x 1L Flasks

Platform Dimensions: Included with BT4001: Included with BT4011:

Included with BT4011: 16 x 16.5 in. / 40.5 x 42 cm

Ambient Operating Temp: 0° to 65°C

13 x 12 in./33 x 30 cm

Weight: BT4000: 25 lbs / 11.3 kg BT4010: 50lbs / 22.7 kg

Dimensions:

BT4001 Shaker:

11.9 x 13.4 x 3.5 in.

30 x 34 x 9cm

BT4011 Shaker:

17 x 18 x 5 in.

43 x 45.75 x 12.7 cm

Cord Length: 60.5 in./154 cm

Electrical: 115V Or 230V, 50-60Hz\*

# Optional - Universal Platforms

BT3000-MR MAGic Clamp universal platform for BT4001 (14x12")
BT4010-MR MAGic Clamp universal platform for BT4011 (16x16.5")
H1010-MR MAGic Clamp universal platform for BT4011 (18x18")

#### Flask & Tube Rack Accessories for MAGic Clamp Platforms

H1000-MR-50 Flask Clamp, 50ml (BT4001: max. 30 / BT4011: max. 49\*)
H1000-MR-125 Flask Clamp, 125ml (BT4001: max. 20 / BT4011: max. 36\*)
H1000-MR-250 Flask Clamp, 250ml (BT4001: max. 14 / BT4011: max. 25\*)
H1000-MR-500 Flask Clamp, 500ml (BT4001: max. 9 / LBT4011: max. 16\*)
H1000-MR-1000 Flask Clamp, 1000ml (BT4001: max. 5 / BT4011: max. 9\*)
H1000-MR-2000 Flask Clamp, 2000ml (BT4001: max. 2 / BT4011: max. 5\*)
Tube Rack, 12x50 & 21x15 ml tubes (BT4001: max. 2 / BT4011: max. 4\*)
Tube Rack, 32x15 tubes (BT4001: max. 3 / BT4011: max. 8\*)

H1000-MR-T50 Tube Rack, 15x50 tubes (BT4001: max. 3 / BT4011: max. 8\*)
H1000-MR-T600 Bottle Rack, 4x500/600ml conical bottles (BT4001: max. 2 / BT4011: max. 4\*)

\*Maximum capacity listed for the BT4011 with the optional H1010-MR MAGic Clamp Platform.





Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

## www.wolflabs.co.uk

Tel: 01759 301142

Fax: 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.