

PRODUCT DATA SHEET

Standing: 2024-01-31

LAUDA PRO P 10 C

Heating bath thermostat 200-230 V; 50/60 Hz

Part Number: L000126

Features

- Thermostatic bath with latest microprocessor technology. Installed cooling coil
- Large 5,7" Multi-Touch-Color display
- Operation with multi touch display
- 360° turnable and detachable control panel for remote control
- User administration for up to 20 user
- Data in- and export via USB
- Timer und count-down-function
- EasyUse system for simple operation of the whole unit
- Low-level and adjustable over-temperature protection with acoustic alarm for use with flammable and non-flammable liquids
- SelfCheck Assistant for system diagnosis
- USB and Ethernet interface equipped as standard
- Retrofittable for upgrading with interface (RS 232/485, Profibus; EtherCAT; analogue or contact modules)
- Fully electronic continuous controller with PID action for internal & external control
- PowerAdapt system for the use of the maximum possible amount of heat permitted by the power supply system
- Programmer with up to 100 programs, up to 50 segments each
- Low height of appliance when control panel removed
- Significantly enlarged accessible volume
- Bath vessel made of stainless steel (insulated, with handles and drain tap)
- Internal LAUDA Varioflex pump with 8 selectable levels



Working temperature min.
40 °C



Working temperature max.
250 °C

PRODUCT DATA SHEET

Standing: 2024-01-31

LAUDA PRO P 10 C

Heating bath thermostat 200-230 V; 50/60 Hz

Part Number: L000126

Technical Features (according to DIN 12876)

| | |
|---|--------------------------------------|
| Working temperature range | 40 ... 250 °C |
| Working temperature range with external cooling | 20 ... 250 °C |
| Operating temperature range | -30 ... 250 °C |
| Ambient temperature range | 5 ... 40 °C |
| Temperature stability | 0.01 ± K |
| Heater power max. | 2.95 kW |
| Power consumption max. | 3 kW |
| Current max. | 13 A |
| Size of bath (W x D x H) | 240 x 150 x 200 mm |
| Bath volume min. / max. | 5.0 / 10.0 L |
| Overall dimensions (WxDxH) | 310 x 335 x 415 mm |
| Weight | 13 kg |
| Power supply | 200-230 V; 50/60 Hz |
| Power plug | Power cord with angled plug (BS1363) |

Reserve technical changes

Standard accessories

- 1 Bath cover
- 2 nipples 10 mm with screw cap G3/8 for cooling water


PRODUCT DATA SHEET

Standing: 2024-01-31

LAUDA PRO P 10 C

Heating bath thermostat 200-230 V; 50/60 Hz

Part Number: L000126

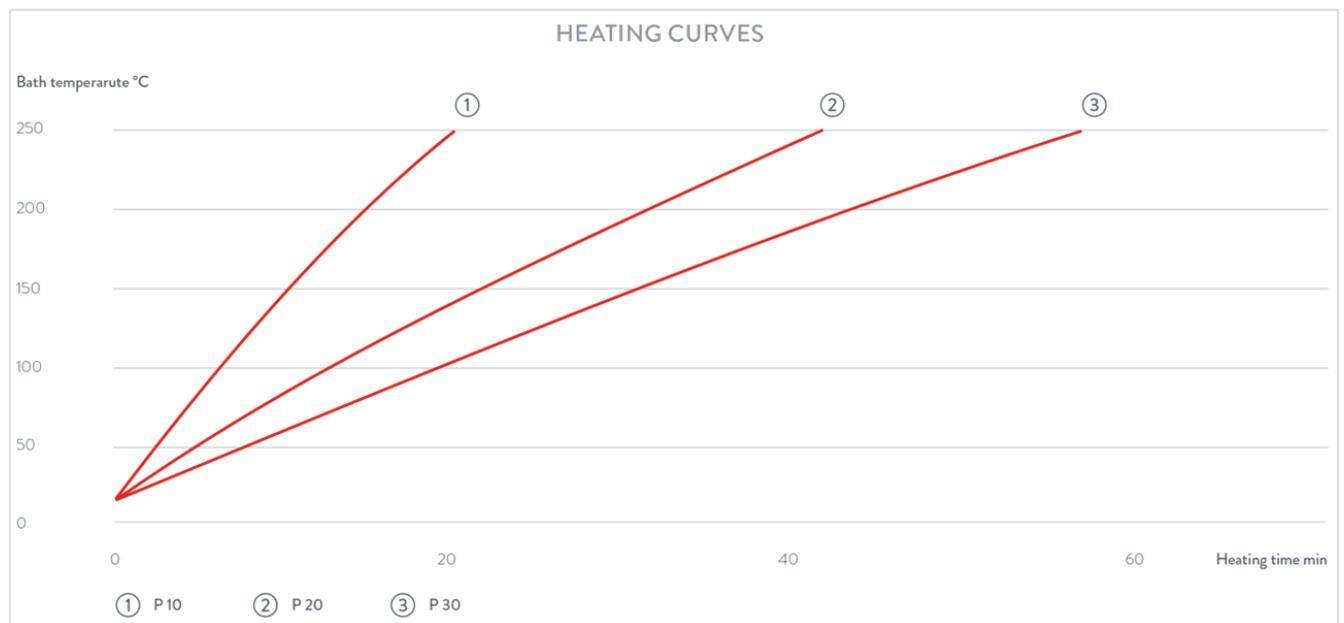

Reserve technical changes



WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.